

Inhaltsverzeichnis

1. DXL - APRSmap englisch	28
2. Benutzer:OE2WAO	12
3. DXL - APRSmap	14
4. DXL - APRSmap Download	20
5. DXL - APRSmap operating	38

DXL - APRSmap englisch

Versionsgeschichte interaktiv durchsuchen
VisuellWikiText

Version vom 15. Juli 2014, 17:47 Uhr (Quelltext anzeigen)

OE2WAO (Diskussion | Beiträge)

K

← Zum vorherigen Versionsunterschied

Aktuelle Version vom 14. August 2021, 14:53 Uhr (Quelltext anzeigen)

OE2WAO (Diskussion | Beiträge)

K

Markierung: Visuelle Bearbeitung

(24 dazwischenliegende Versionen desselben Benutzers werden nicht angezeigt)

Zeile 1:

[[Kategorie:APRS]]

- [[Datei:Deutschland-flagge.gif]] Für die deutsche Version dieses Projekts [[DXL - APRSmap | >>hier klicken<<]]

APRSmap is a new APRS client software by OE5DXL, which is based on the [http://www.osm.org OSM] map source. It allows a lot of features in only one program by a good usability. NO installation is required, just put it on a disk an start it!

- [[Datei:aprsmap.png]]

Zeile 1:

[[Kategorie:APRS]]

+ [[Datei:Deutschland-flagge.gif | link=DXL - APRSmap]] Für die deutsche Version dieses Projekts [[DXL - APRSmap | >>hier klicken<<]]

+ [[Datei:Aprsmap-download.ipq | link=DXL - APRSmap Download]]

APRSmap is a new APRS client software by OE5DXL, which is based on the [http://www.osm.org OSM] map source. It allows a lot of features in only one program by a good usability. NO installation is required, just put it on a disk an start it!

+ [[Datei:Aprsmap.png]]

+ A lot of documentation work will have to be done soon !!

+ ==Features==

+

- + *OpenSource and already compiled for windows and linux
- + *100% compliance with the current APRS protocol specifications
- + *No installation required, just copy and start
- + *No unnecessary menus, focus is on the representation
- + *IP-based, out-of-the-box network-ready in HAMNET and Internet
- + *Operations best controlled via shortcuts
- + *Local serial connection (TNC) possible - operating as an RF IGATE
- + *Several MapSources can be used. By default, this is OSM - OpenStreetMap
- + *Downloading map source on demand
- + *Track filter for delayed / late / repeated packets "f"
- + *Radio propagation calculation (since v0.36) "R"
- + *Animation of tracks with timeline "a"
- + *Animation of the temperature distribution "w"
- + *Messaging
- +
- +
- + ==Installation==
 - + After downloading the program you only have to extract the files into a subfolder of your program files folder, e.g. /APRSmap.

 - + No installation routine is required, just extract and run the aprsmap.exe
- +

- + **==Operation manual and help==**
- + **[[DXL - APRSmap operating|>> Operating instructions]] - the help in handling the program**
- +
- +
- +
- + **[[Datei:Aprsmap-1st-start.jpg]]**
- +
- + **On the first start of the program it is necessary to do some configuration. The most important things you have to adjust are in the ONLINE menu. You best configure all steps from up till down.**
- +
- + ***First of all you put in your callsign (MY CALLSIGN) with optional SSID**
- + ***Second step is to choose your desired APRS icon (MY SYMBOL)**
- + ***Next you will zoom to your QTH as far as you can, 100% identifying your home (zoom level >16). Then open ONLINE - MY POSITION and point to your home with the cursor. While push and hold the SHIFT key click on your home. The coordinates will be copied into the MY POSITION field. Just click OK to save them.**
- + ***Now you can set the SERVER URL by just inserting your favorite APRS IS. Click ADD to save this entry.**
- +
- + **for example:**
- + **aprs.oe2xzr.ampr.at (APRS IS connection via HAMNET)**

- + **austria.aprs2.net (APRS IS connection via Internet)**
- + ***You also need to enter a valid APRS PASSCODE to transmit packets to the APRS network (not needed in case of only RX). Just do a internet search on APRS PASSCODE to find a possibility on getting your code.**
- + ***Last but not least you have to activate CONNECT SERVER to get data from an to the APRS network.**
- + **====Shortcuts====**
- + **<nowiki>:</nowiki> delete markers**
- + **@ reset <On Next Click> to menu mode**
- + **a Animate (Click to Map to set Parameters)**
- + **b or <Backspace> go back in position history**
- + **c Center (to last clicked Pixel)**
- + **d toggle (missing) map download**
- + **e toggle Errors only/All for stepping along a track with <>**
- + **f Junk Filter toggle on/off**
- + **h Heard (click symbol or text of ignore before)**
- + **i Internal Status Listing**
- + **l toggle Labels on/off**
- + **m toggle dimm not moving since 10min**
- + **o toggle Objects/Items on/off**
- + **p toggle mouse-over Hints**
- + **q Quit Program**

- + **r toggle Radio tracks on/off**
- + **s toggle show only stations with a selected symbol**
- + **u toggle tx/rx-Monitor window on/off**
- + **w toggle WX stations and Temperature**
- + **x set Marker 1 to mouse position**
- + **y set Marker 2 and Line to Marker 1**
- + **B Open Beacon editor**
- + **C Enter Category of POI to be drawn on map**
- + **D Digi Config open/close**
- + **F Find Call (with wildcards * ?), Locator, Latitude/Longitude**
- + **H Altitude Colour Map (if srtm-Data available)**
- + **M Compose Message**
- + **R toggle Radiorange Map on/off**
- + **T toggle Timestamp**
- + **S Screenshot bpm (win), png (linux)**
- + **W Rain map (use topo or dark map)**
- + **< > Step along Beacons/Waypoints of a selected User**
- + **() Map Brightness +- 5%**
- + **/ zoom to Marker 1-2 Square**
- + **\ shortcut list**
- + **~ change track colour**
- + **+ Zoom in - Zoom out**
- + **. zoom to track and show only this (clicked before)**
- + **= same as . but with radio tracks**
- + **0 show all (and radio tracks off)**

- + **1,2,3,4 Zoom/Pan to stored Views**
- + **7,8,9 use map type as configured**
- + **ESC close menus**
- + **Cursor up/down/left/right move map, same as click near margin**
- + **SHIFT with up/down/left/right/ [zoom+]/[zoom-] in smaller steps**
- + **DEL delete selected (Symbol, Waypoint)**
- + **TAB switch between two Views**
- + **ctrl-L Reset Image and Mouse parameters to default**
- + **ctrl-V Paste**
- + **==[[DXL - APRSmap Download | Download]]==**
- + **[[Datei:Aprsmap-download.ipq | link=DXL - APRSmap Download]]**
- + **[[DXL - APRSmap Download | APRSmap Download]] - For Windows, Linux and ARM (Raspberry Pi)**

- ==Software==

The software is available for OS like
WINDOWS, LINUX and systems based on ARM structures like raspberry pi.

- ===Windows version==

* **[<http://oe5dxi.ampr.at> directly via HAMNET] with latest updates
"(HAMNET-connection required)"
**

* **or [[Media:Aprsmap-getmap.zip | direct Win32 download]] out of this Wiki
**

+ ==Further operation manual==

more information is up to come

Aktuelle Version vom 14. August 2021, 14:53 Uhr




Für die deutsche Version dieses Projekts >>[hier klicken](#)<<



APRSmap Download

APRSmap is a new APRS client software by OE5DXL, which is based on the [OSM](#) map source. It allows a lot of features in only one program by a good usability. NO installation is required, just put it on a disk an start it!

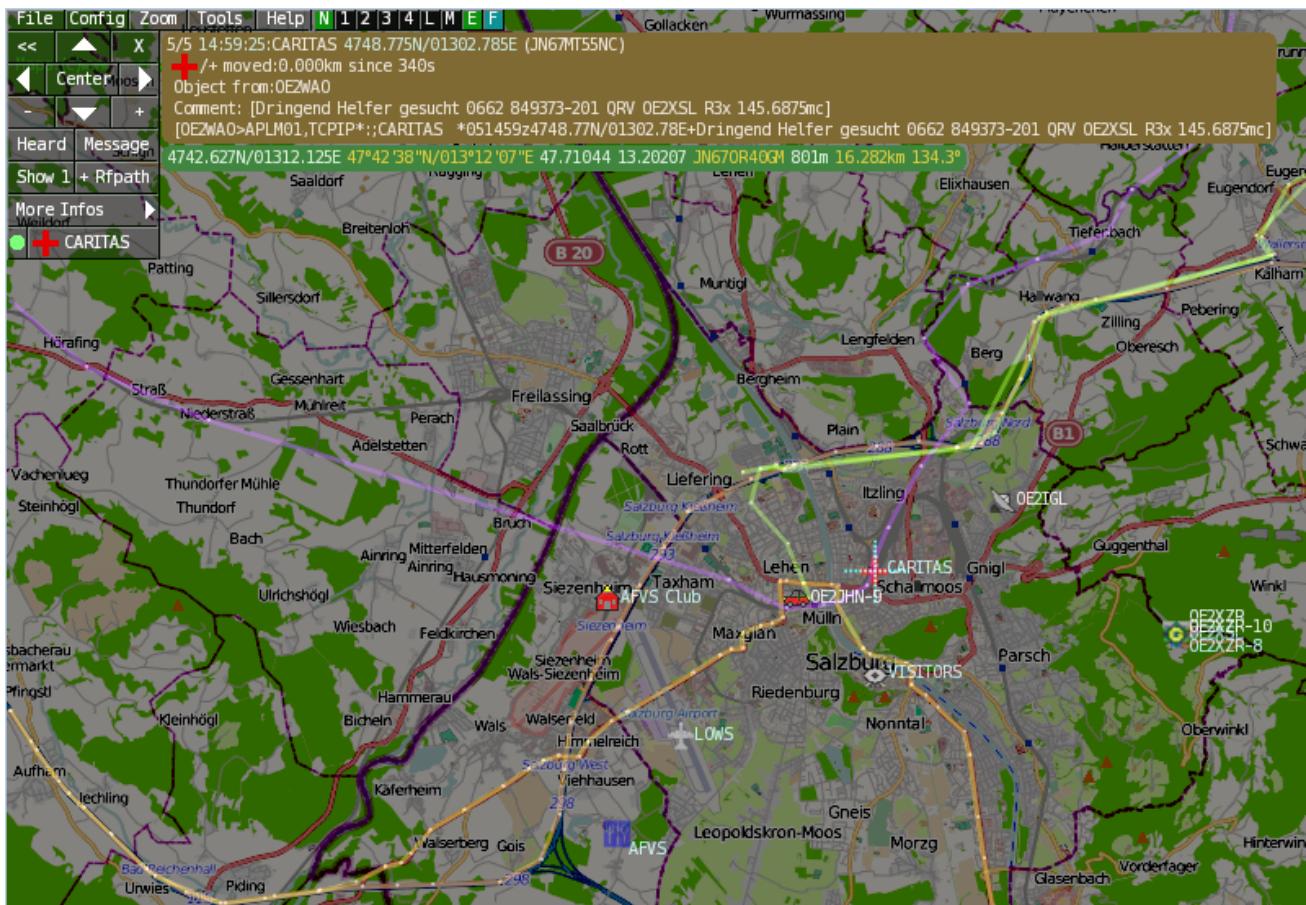

A lot of documentation work will have to be done soon !!

Inhaltsverzeichnis

1 Features	35
2 Installation	35
3 Operation manual and help	35
3.1 Shortcuts	36
4 Download	37
5 Further operation manual	37

Features

- OpenSource and already compiled for windows and linux
- 100% compliance with the current APRS protocol specifications
- No installation required, just copy and start
- No unnecessary menus, focus is on the representation
- IP-based, out-of-the-box network-ready in HAMNET and Internet
- Operations best controlled via shortcuts
- Local serial connection (TNC) possible - operating as an RF IGATE
- Several MapSources can be used. By default, this is OSM - OpenStreetMap
- Downloading map source on demand
- Track filter for delayed / late / repeated packets "f"
- Radio propagation calculation (since v0.36) "R"
- Animation of tracks with timeline "a"
- Animation of the temperature distribution "w"
- Messaging

Installation

After downloading the program you only have to extract the files into a subfolder of your program files folder, e.g. /APRSmap.

No installation routine is required, just extract and run the aprsmap.exe

Operation manual and help

[>> Operating instructions](#) - the help in handling the program



APRSmap 1st Start

On the first start of the program it is necessary to do some configuration. The most important things you have to adjust are in the ONLINE menu. You best configure all steps from up till down.

- First of all you put in your callsign (MY CALLSIGN) with optional SSID
- Second step is to choose your desired APRS icon (MY SYMBOL)
- Next you will zoom to your QTH as far as you can, 100% identifying your home (zoom level >16). Then open ONLINE - MY POSITION and point to your home with the cursor. While push and hold the SHIFT key click on your home. The coordinates will be copied into the MY POSITION field. Just click OK to save them.
- Now you can set the SERVER URL by just inserting your favorite APRS IS. Click ADD to save this entry.

```
for example:  
aprs.oe2xzr.apr.at (APRS IS connection via HAMNET)  
austria.aprs2.net (APRS IS connection via Internet)
```

- You also need to enter a valid APRS PASSCODE to transmit packets to the APRS network (not needed in case of only RX). Just do a internet search on APRS PASSCODE to find a possibility on getting your code.
- Last but not least you have to activate CONNECT SERVER to get data from an to the APRS network.

Shortcuts

```
: delete markers  
@ reset <On Next Click> to menu mode  
a Animate (Click to Map to set Parameters)  
b or <Backspace> go back in position history  
c Center (to last clicked Pixel)  
d toggle (missing) map download  
e toggle Errors only/All for stepping along a track with <>  
f Junk Filter toggle on/off  
h Heard (click symbol or text of igate before)  
i Internal Status Listing  
l toggle Labels on/off  
m toggle dimm not moving since 10min  
o toggle Objects/Items on/off  
p toggle mouse-over Hints  
q Quit Program  
r toggle Radio tracks on/off  
s toggle show only stations with a selected symbol  
u toggle tx/rx-Monitor window on/off  
w toggle WX stations and Temperature  
x set Marker 1 to mouse position  
y set Marker 2 and Line to Marker 1  
B Open Beacon editor  
C Enter Category of POI to be drawn on map  
D Digi Config open/close  
F Find Call (with wildcards * ?), Locator, Latitude/Longitude  
H Altitude Colour Map (if srtm-Data available)  
M Compose Message  
R toggle Radiorange Map on/off  
T toggle Timestamp  
S Screenshot bpm (win), png (linux)  
W Rain map (use topo or dark map)  
< > Step along Beacons/Waypoints of a selected User  
( ) Map Brightness +- 5%  
/ zoom to Marker 1-2 Square  
\ shortcut list  
~ change track colour  
+ Zoom in - Zoom out  
. zoom to track and show only this (clicked before)  
= same as . but with radio tracks  
0 show all (and radio tracks off)  
1,2,3,4 Zoom/Pan to stored Views  
7,8,9 use map type as configured  
ESC close menus
```

```
Cursor up/down/left/right move map, same as click near margin  
SHIFT with up/down/left/right/[zoom+]/[zoom-] in smaller steps  
DEL delete selected (Symbol, Waypoint)  
TAB switch between two Views  
ctrl-L Reset Image and Mouse parameters to default  
ctrl-V Paste
```

[Download](#)



[APRSmap Download](#)

[APRSmap Download](#) - For Windows, Linux and ARM (Raspberry Pi)

[Further operation manual](#)

more information is up to come

DXL - APRSmap englisch und Benutzer:OE2WAO: Unterschied zwischen den Seiten

VisuellWikitext

Version vom 15. Juli 2014, 17:47 Uhr (Quelltext anzeigen)

OE2WAO (Diskussion | Beiträge)

K

Aktuelle Version vom 9. August 2020, 23:41 Uhr (Quelltext anzeigen)

OE2WAO (Diskussion | Beiträge)

(Die Seite wurde neu angelegt:
„<https://oe2wao.info>“)

Zeile 1:

- [[Kategorie:APRS]]
-
- [[Datei:Deutschland-flagge.gif]] Für die deutsche Version dieses Projekts
- [[DXL - APRSmap | >>hier klicken<<]]
-

APRSmap is a new APRS client software by OE5DXL, which is based on the [http://www.osm.org OSM] map source. It allows a lot of features in only one program by a good usability. NO installation is required, just put it on a disk an start it!

-
- [[Datei:aprsmap.png]]
-

==Software==

The software is available for OS like WINDOWS, LINUX and systems based on ARM structures like raspberry pi.

====Windows version=====

* [http://oe5dxl.ampr.at directly via HAMNET] with latest updates
"(HAMNET-connection required)"

* or [[Media:Aprsmap-qetmap.zip | direct Win32 download]] out of this Wiki

Zeile 1:

- + <https://oe2wao.info>

Aktuelle Version vom 9. August 2020, 23:41 Uhr

<https://oe2wao.info>

DXL - APRSmap englisch und DXL - APRSmap: Unterschied zwischen den Seiten

VisuellWikitext

Version vom 15. Juli 2014, 17:47 Uhr (Quelltext anzeigen)

OE2WAO (Diskussion | Beiträge)

K

Aktuelle Version vom 9. April 2021, 09:08 Uhr (Quelltext anzeigen)

OE2WAO (Diskussion | Beiträge)

K

Markierung: Visuelle Bearbeitung

Zeile 1:

[[Kategorie:APRS]]

- [[Datei:Deutschland-flaqqe.gif]] Für die deutsche Version dieses Projekts [[DXL - APRSmap | >>hier klicken<<]]

APRSmap is a new APRS client software by OE5DXL, which is based on the [http://www.osm.org OSM] map source. It allows a lot of features in only one program by a good usability. NO installation is required, just put it on a disk and start it!

- [[Datei:aprsmap.png]]

- ==Software==

- The software is available for OS like WINDOWS, LINUX and systems based on ARM structures like raspberry pi.

====Windows version====

Zeile 1:

[[Kategorie:APRS]]

+ [[Kategorie:Digitaler Backbone]]

+ [[Datei:Englisch.ipq | link=DXL - APRSmap englisch]] For english version on this project [[DXL - APRSmap englisch | >>click here<<]]

[[Datei:Aprsmap-download.ipq | link=DXL - APRSmap Download]]

+ :<code>''Aktuelle Programmversion v0.79''</code>

+ ==Einleitung==

- + **APRSmap ist ein von ""OE5DXL Christian"" entwickelter, kostenlos er APRS Client mit grafischer Oberfläche, welcher als Basis das Kartenmaterial von [http://www.osm.org OSM] benutzt.**
- * [http://oe5dxl.ampr.at directly via HAMNET] with latest updates "(HAMNET connection required)"
 +
- * or [[Media:Aprsmap-qetmap.zip | direct Win32 download]] out of this Wiki
 +
- + [[Datei:Aprsmap.png]]
- + ==Features==
- + + ***OpenSource und bereits fertig für Windows und Linux compiliert**
- + + ***100%ige Einhaltung der aktuellen APRS Protokoll Vorgaben**
- + + ***Keine Installation erforderlich, nur kopieren und starten**
- + + ***Keine überflüssigen Menüs, Fokus auf der Darstellung**
- + + ***IP-basiert, somit out-of-the-box netzwerkfähig im HAMNET sowie Internet**
- + + ***Bedienung idealerweise über Shortcuts**
- + + ***Lokale serielle Anbindung (TNC) möglich - Betrieb als HF IGATE**
- + + ***Zur Darstellung können mehrere Mapsources verwendet werden. Standardmäßig ist dies OSM - OpenStreetMap**
- + + ***Trackfilter für verzögert/verspätet /wiederholte Pakete "f"**

- + *Geländeschnitt und Funkausbreitungsberechnung (ab v0.36) "R"
- + *Animation von Tracks mit Zeitleiste "a"
- + *Animation der Temperaturverteilung "w"
- + *Messaging
- +
- + ==[[DXL - APRSmap Bedienung | Bedienung und Hilfe]]==
- +
- + [[DXL - APRSmap Bedienung | Bedienungsanleitung]] - Die Hilfe beim Umgang mit dem Programm
- +
- + [[Datei:Aprsmap-1st-start.jpg | link=DXL - APRSmap_Bedienung#Erste_Schritte]]
- +
- + ==[[DXL - APRSmap Download | Download]]==
- + [[DXL - APRSmap Download | APRSmap Download]] - Für Windows, Linux und ARM (Raspberry Pi)
- +
- + [[Datei:Aprsmap-download.jpg | link=DXL - APRSmap Download]]
- +
- + ==Referenz==
- + Das Programm APRSmap wurde für den ÖVSV Innovationspreis 2013 nominiert.
- +
- + ==Weitere Projekte==

- + Weiter passende Projekte von OE5DXL aus dieser Serie sind
- + *
- + *[[DXL - APRStracker]] - Hard- und Software für einen minimalistischen APRS Tracker
- + *[[TCE Tinycore Linux Projekt]] - Der mächtige und innovative Digipeater für APRS, Packet Radio, Echolink, u.v.m.
- + ==Weblinks==
- + Kurzlink hier her: <http://aprsmap.oevsv.at>

Aktuelle Version vom 9. April 2021, 09:08 Uhr



For english version on this project >>[click here](#)<<



APRSmap Download


Aktuelle Programmversion v0.79

Inhaltsverzeichnis

1 Einleitung	18
2 Features	18
3 Bedienung und Hilfe	19
4 Download	19
5 Referenz	19
6 Weitere Projekte	19
7 Weblinks	19

Einleitung

APRSmap ist ein von **OE5DXL Christian** entwickelter, kostenloser APRS Client mit grafischer Oberfläche, welcher als Basis das Kartenmaterial von [OSM](#) benutzt.

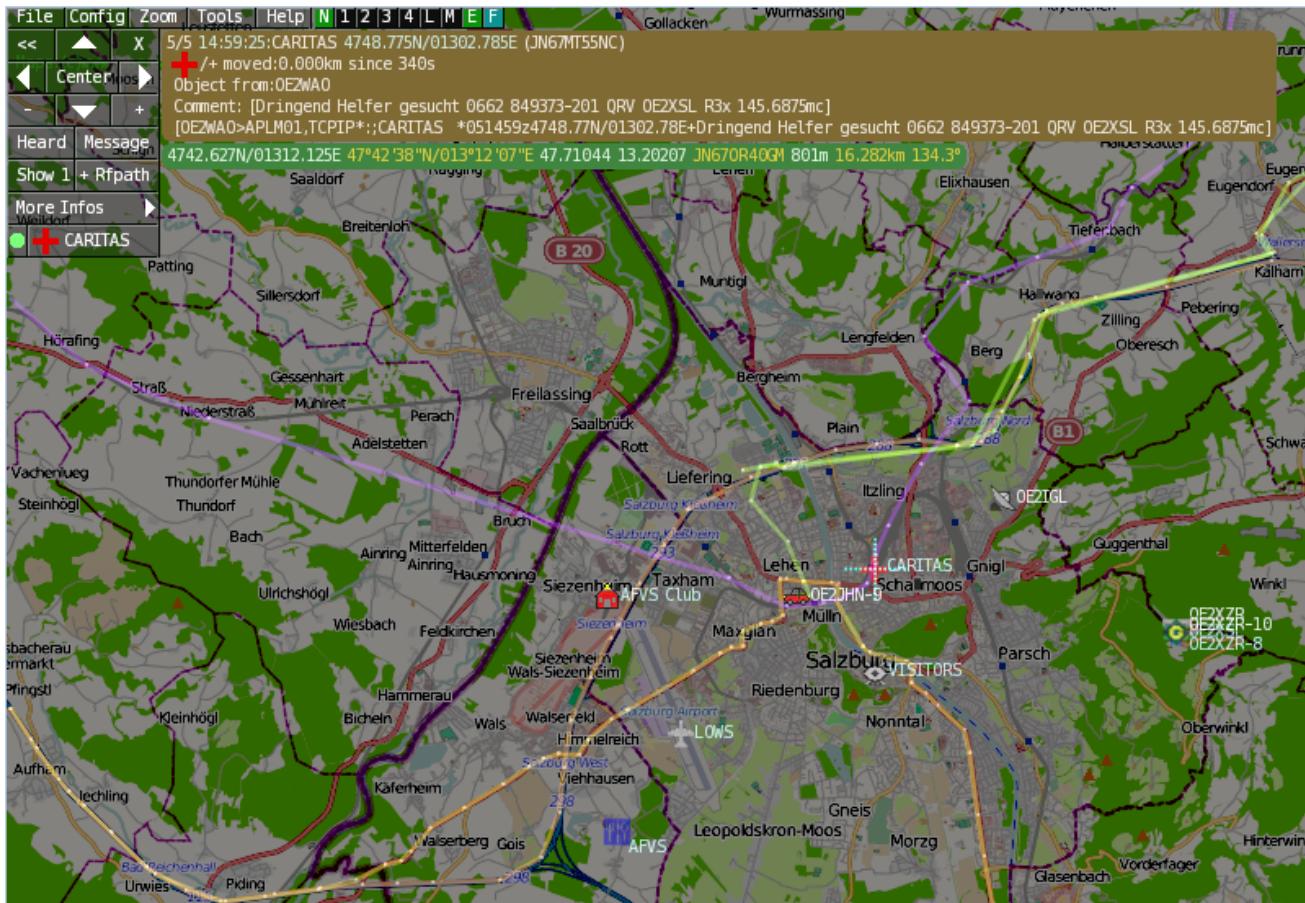

Features

- OpenSource und bereits fertig für Windows und Linux compiliert
- 100%ige Einhaltung der aktuellen APRS Protokoll Vorgaben
- Keine Installation erforderlich, nur kopieren und starten
- Keine überflüssigen Menüs, Fokus auf der Darstellung
- IP-basiert, somit out-of-the-box netzwerkfähig im HAMNET sowie Internet
- Bedienung idealerweise über Shortcuts
- Lokale serielle Anbindung (TNC) möglich - Betrieb als HF IGATE
- Zur Darstellung können mehrere Mapsources verwendet werden. Standardmäßig ist dies OSM - OpenStreetMap
- Trackfilter für verzögert/verspätet/wiederholte Pakete "f"
- Geländeschnitt und Funkausbreitungsberechnung (ab v0.36) "R"
- Animation von Tracks mit Zeitleiste "a"
- Animation der Temperaturverteilung "w"
- Messaging

Bedienung und Hilfe

Bedienungsanleitung - Die Hilfe beim Umgang mit dem Programm



APRSmap 1st Start

Download

[APRSmap Download](#) - Für Windows, Linux und ARM (Raspberry Pi)



APRSmap Download

Referenz

Das Programm APRSmap wurde für den ÖVSV Innovationspreis 2013 nominiert.

Weitere Projekte

Weiter passende Projekte von OE5DXL aus dieser Serie sind

- [DXL - APRStracker](#) - Hard- und Software für einen minimalistischen APRS Tracker
- [TCE Tinycore Linux Projekt](#) - Der mächtige und innovative Digipeater für APRS, Packet Radio, Echolink, u.v.m.

Weblinks

Kurzlink hier her: <http://aprsmap.oevsv.at>

DXL - APRSmap englisch und DXL - APRSmap Download: Unterschied zwischen den Seiten

VisuellWikitext

Version vom 15. Juli 2014, 17:47 Uhr (Quelltext anzeigen)

OE2WAO (Diskussion | Beiträge)

K

Aktuelle Version vom 2. Januar 2023, 13:16 Uhr (Quelltext anzeigen)

OE2WAO (Diskussion | Beiträge)

(SRTM Info hinzugefügt)

Markierung: Visuelle Bearbeitung

Zeile 1:

[[Kategorie:APRS]]

Zeile 1:

[[Kategorie:APRS]]

+ **D: Die Software gibt es je in einer Linux- und einer Windowsversion, sowie den Sourcecode zum selbst compilieren.
**

+ **Dabei benötigt APRSmap keine Installationroutine. Die Dateien im Archiv müssen lediglich entpackt und lokal gespeichert werden (bspw. unter C:\APRSmap).**

- **[[Datei:Deutschland-flagge.gif]] Für die deutsche Version dieses Projekts [[DXL - APRSmap | >>hier klicken<<]]**

+ **"E: The software is available for OS like WINDOWS, LINUX and systems based on ARM structures like raspberry pi."
**

+ **"There is no installation routine. Just download the archive and save the files locally on your hard disc or removable drive" (e.g. under C:\APRSmap)"."**

- **APRSmap is a new APRS client software by OE5DXL, which is based on the [http://www.osm.org OSM] map source. It allows a lot of features in only one program by a good usability. NO installation is required, just put it on a disk and start it!**

+ **[[Datei:Aprsmap-1st-start.jpg | link=DXL - _APRSmap_Bedienung#Erste_Schritte]]**

- [[Datei:aprsmap.png]]
 - ==Software==

The software is available for OS like **WINDOWS, LINUX** and systems based on ARM structures like raspberry pi.
 - ===Windows version===

* [http://oe5dnl.ampr.at directly via HAMNET] with latest updates "(HAMNET-connection required)"

 - * or [[Media:Aprsmap-getmap.zip | direct Win32 download]] out of this Wiki

- + ==Windows==

D: Die Dateien aus dem heruntergeladenen Archiv werden lokal in den Unterordner /APRSMAP (muss selbst angelegt werden) entpackt bzw. gespeichert.
 - + "E: The files from the downloaded archive are unpacked and saved locally in the subfolder /APRSMAP (must be created yourself)."
 - + *[[Datei:Aprsmap-download-win-inet.ipq|link=https://wiki.oevsv.at/w/index.php?title=Aprsmap-all.zip]] >> "[[Medium:Aprsmap-all.zip|APRSmap Download via Wiki]]" << (Detail Version [[Datei:Aprsmap-all.zip]])
 - + *[[Datei:Aprsmap-download-win-hamnet.ipq|link=http://oe5dnl.ampr.at/APRSmap Download via HAMNET mit aktuellen Updates "(HAMNET-Verbindung erforderlich - HAMNET connection required)"]]
 - + ""Win32 Dateiliste""
 - + Übersicht der [[APRSmap-Dateien]] unter Win32 Betriebssystemen.

- + []
- + ==Linux==
- + ===HAMNET==
- + []
- + *[http://oe5dxl.ampr.at] - x86 (mit aktuellen Updates)
- + []
- + ===Internet==
- + komplette dxIAPRS Toolchain fertig compiliert für folgende Systeme:
- + []
- + *[https://github.com/oe5hpm/dxIAPRS] - Sourcecode
- + *[http://dxlaprs.hamspirit.at/dxIAPRS_x86-current.tgz] - x86
- + *[http://dxlaprs.hamspirit.at/dxIAPRS_armv7hf-current.tqz] - ARMv7hf (Cortex-A8, AM335x, BeagleBone, ...)
- + *[http://dxlaprs.hamspirit.at/dxIAPRS_armv6-current.tgz] - ARMv6 (Raspberry Pi)
- + []
- + ==ARM - Raspberry Pi==
- + [[aprsDXL auf ARM resp. Raspberry Pi]]
- + []
- + []
- + ==POI Files==
- + D: Österreichische POI (point of interest) Dateien für APRSmap.
- + []
- + "E: Austrian POI (point of interest) files for use in APRSmap."

- + [\[\[Medium:APRSmap-poi.zip| APRSmap POI Download\]\]](#)
- + [==Source Code==](#)
- + [Die Sourcen vom dxIAPRS-Projekt sind auf Github veröffentlicht.](#)
- + [Aus diesen kann derzeit für folgende Plattformen gebaut werden:](#)
 - + [*x86](#)
 - + [*armv6 \(Raspberry Pi\)](#)
 - + [*armv7 \(beur am335x pp, Beaglebone, ...\)](#)
- + [https://github.com/oe5hpm/dxIAPRS
](#)
- + [==Release Notes==](#)
- + [\[\[APRSmap Release notes\]\]](#)
- + [== SRTM Höhendaten zur Funkausbreitungs- und Wegstreckenberechnung ==](#)
 - D: Um die Funktion "Radiolink" verwenden zu können, sind zur Berechnung der Geländegegebenheiten exakte Höhendaten erforderlich. Diese werden im entsprechenden \OSM Subordner des APRSmap Arbeitsverzeichnisses abgelegt. APRSmap selbst benutzt dabei jeweils die zur Verfügung stehenden Daten mit der höchsten Auflösung. Die Daten sind ausschließlich im HAMNET zu finden unter:

+

E: In order to be able to use the "Radiolink" function, exact elevation data is required to calculate the terrain conditions. These are stored in the corresponding \OSM subfolder of the APRSmap working directory. APRSmap itself uses the available data with the highest resolution. The data can only be found in HAMNET at:

+

+

**[http://web.oe2xzr.ampr.org
/download/?dir=Digital_modes/APRS](http://web.oe2xzr.ampr.org/download/?dir=Digital_modes/APRS)**

+

+

+

+

[[DXL - APRSmap | << Zurück zur DXL-APRSmap Übersicht]]

Aktuelle Version vom 2. Januar 2023, 13:16 Uhr

D: Die Software gibt es je in einer Linux- und einer Windowsversion, sowie den Sourcecode zum selbst compilieren.

Dabei benötigt APRSmap keine Installationroutine. Die Dateien im Archiv müssen lediglich entpackt und lokal gespeichert werden (bspw. unter C:\APRSmap).

E: The software is available for OS like WINDOWS, LINUX and systems based on ARM structures like raspberry pi.

There is no installation routine. Just download the archive and save the files locally on your hard disc or removable drive (e.g. under C:\APRSmap).



APRSmap 1st Start

Inhaltsverzeichnis

1 Windows	26
2 Linux	26
2.1 HAMNET	26
2.2 Internet	26
3 ARM - Raspberry Pi	26

4 POI Files	26
5 Source Code	27
6 Release Notes	27
7 SRTM Höhendaten zur Funkausbreitungs- und Wegstreckenberechnung	27

Windows

D: Die Dateien aus dem heruntergeladenen Archiv werden lokal in den Unterordner /APRSMAP (muss selbst angelegt werden) entpackt bzw. gespeichert.

E: The files from the downloaded archive are unpacked and saved locally in the subfolder /APRSMAP (must be created yourself).

-  **Download via Internet** >> [APRSmap Download via Wiki](#) << (Detail)
Version [Datei:Aprsmap-all.zip](#)

-  **Download via HAMNET** APRSmap Download via HAMNET mit aktuellen Updates (*HAMNET-Verbindung erforderlich - HAMNET connection required*)

Win32 Dateiliste

Übersicht der [APRSmap-Dateien](#) unter Win32 Betriebssystemen.

Linux

HAMNET

- [\[1\]](#) - x86 (mit aktuellen Updates)

Internet

komplette dxIAPRS Toolchain fertig compiliert für folgende Systeme:

- [\[2\]](#) - Sourcecode
- [\[3\]](#) - x86
- [\[4\]](#) - ARMv7hf (Cortex-A8, AM335x, BeagleBone, ...)
- [\[5\]](#) - ARMv6 (Raspberry Pi)

ARM - Raspberry Pi

[aprsDXL auf ARM resp. Raspberry Pi](#)

POI Files

D: Österreichische POI (point of interest) Dateien für APRSmap.

E: Austrian POI (point of interest) files for use in APRSmap.

[APRSmap POI Download](#)

Source Code

Die Sourcen vom dxIAPRS-Projekt sind auf Github veröffentlicht. Aus diesen kann derzeit für folgende Plattformen gebaut werden:

- x86
- armv6 (Raspberry Pi)
- armv7 (bur am335x pp, Beaglebone, ...)

<https://github.com/oe5hpm/dxIAPRS>

Release Notes

[APRSmap Release notes](#)

SRTM Höhendaten zur Funkausbreitungs- und Wegstreckenberechnung

D: Um die Funktion "Radiolink" verwenden zu können, sind zur Berechnung der Geländegegebenheiten exakte Höhendaten erforderlich. Diese werden im entsprechenden \OSM Subordner des APRSmap Arbeitsverzeichnisses abgelegt. APRSmap selbst benutzt dabei jeweils die zur Verfügung stehenden Daten mit der höchsten Auflösung. Die Daten sind ausschließlich im HAMNET zu finden unter:

E: In order to be able to use the "Radiolink" function, exact elevation data is required to calculate the terrain conditions. These are stored in the corresponding \OSM subfolder of the APRSmap working directory. APRSmap itself uses the available data with the highest resolution. The data can only be found in HAMNET at:

http://web.oe2xzr.ampr.org/download/?dir=Digital_modes/APRS

[**<< Zurück zur DXL-APRSmap Übersicht**](#)

DXL - APRSmap englisch: Unterschied zwischen den Versionen

Versionsgeschichte interaktiv durchsuchen

VisuellWikitext

Version vom 15. Juli 2014, 17:47 Uhr (Quelltext anzeigen)

OE2WAO (Diskussion | Beiträge)

K

← Zum vorherigen Versionsunterschied

Aktuelle Version vom 14. August 2021, 14:53 Uhr (Quelltext anzeigen)

OE2WAO (Diskussion | Beiträge)

K

Markierung: Visuelle Bearbeitung

(24 dazwischenliegende Versionen desselben Benutzers werden nicht angezeigt)

Zeile 1:

[[Kategorie:APRS]]

- [[Datei:Deutschland-flagge.gif]] Für die deutsche Version dieses Projekts [[DXL - APRSmap | >>hier klicken<<]]

APRSmap is a new APRS client software by OE5DXL, which is based on the [http://www.osm.org OSM] map source. It allows a lot of features in only one program by a good usability. NO installation is required, just put it on a disk an start it!

- [[Datei:aprsmap.png]]

Zeile 1:

[[Kategorie:APRS]]

+ [[Datei:Deutschland-flagge.gif | link=DXL - APRSmap]] Für die deutsche Version dieses Projekts [[DXL - APRSmap | >>hier klicken<<]]

+ [[Datei:Aprsmap-download.ipq | link=DXL - APRSmap Download]]

APRSmap is a new APRS client software by OE5DXL, which is based on the [http://www.osm.org OSM] map source. It allows a lot of features in only one program by a good usability. NO installation is required, just put it on a disk an start it!

+ [[Datei:Aprsmap.png]]

+ A lot of documentation work will have to be done soon !!

+ ==Features==

- + *OpenSource and already compiled for windows and linux
- + *100% compliance with the current APRS protocol specifications
- + *No installation required, just copy and start
- + *No unnecessary menus, focus is on the representation
- + *IP-based, out-of-the-box network-ready in HAMNET and Internet
- + *Operations best controlled via shortcuts
- + *Local serial connection (TNC) possible - operating as an RF IGATE
- + *Several MapSources can be used. By default, this is OSM - OpenStreetMap
- + *Downloading map source on demand
- + *Track filter for delayed / late / repeated packets "f"
- + *Radio propagation calculation (since v0.36) "R"
- + *Animation of tracks with timeline "a"
- + *Animation of the temperature distribution "w"
- + *Messaging
- +
- +
- + ==Installation==
 - + After downloading the program you only have to extract the files into a subfolder of your program files folder, e.g. /APRSmap.

 - + No installation routine is required, just extract and run the aprsmap.exe
- +

- + **==Operation manual and help==**
- + **[[DXL - APRSmap operating|>> Operating instructions]] - the help in handling the program**
- +
- +
- +
- + **[[Datei:Aprsmap-1st-start.jpg]]**
- +
- + **On the first start of the program it is necessary to do some configuration. The most important things you have to adjust are in the ONLINE menu. You best configure all steps from up till down.**
- +
- + ***First of all you put in your callsign (MY CALLSIGN) with optional SSID**
- + ***Second step is to choose your desired APRS icon (MY SYMBOL)**
- + ***Next you will zoom to your QTH as far as you can, 100% identifying your home (zoom level >16). Then open ONLINE - MY POSITION and point to your home with the cursor. While push and hold the SHIFT key click on your home. The coordinates will be copied into the MY POSITION field. Just click OK to save them.**
- + ***Now you can set the SERVER URL by just inserting your favorite APRS IS. Click ADD to save this entry.**
- +
- + **for example:**
- + **aprs.oe2xzr.ampr.at (APRS IS connection via HAMNET)**

- + **austria.aprs2.net (APRS IS connection via Internet)**
- + ***You also need to enter a valid APRS PASSCODE to transmit packets to the APRS network (not needed in case of only RX). Just do a internet search on APRS PASSCODE to find a possibility on getting your code.**
- + ***Last but not least you have to activate CONNECT SERVER to get data from an to the APRS network.**
- + **====Shortcuts====**
- + **<nowiki>:</nowiki> delete markers**
- + **@ reset <On Next Click> to menu mode**
- + **a Animate (Click to Map to set Parameters)**
- + **b or <Backspace> go back in position history**
- + **c Center (to last clicked Pixel)**
- + **d toggle (missing) map download**
- + **e toggle Errors only/All for stepping along a track with <>**
- + **f Junk Filter toggle on/off**
- + **h Heard (click symbol or text of ignore before)**
- + **i Internal Status Listing**
- + **l toggle Labels on/off**
- + **m toggle dimm not moving since 10min**
- + **o toggle Objects/Items on/off**
- + **p toggle mouse-over Hints**
- + **q Quit Program**

- + **r toggle Radio tracks on/off**
- + **s toggle show only stations with a selected symbol**
- + **u toggle tx/rx-Monitor window on/off**
- + **w toggle WX stations and Temperature**
- + **x set Marker 1 to mouse position**
- + **y set Marker 2 and Line to Marker 1**
- + **B Open Beacon editor**
- + **C Enter Category of POI to be drawn on map**
- + **D Digi Config open/close**
- + **F Find Call (with wildcards * ?), Locator, Latitude/Longitude**
- + **H Altitude Colour Map (if srtm-Data available)**
- + **M Compose Message**
- + **R toggle Radiorange Map on/off**
- + **T toggle Timestamp**
- + **S Screenshot bpm (win), png (linux)**
- + **W Rain map (use topo or dark map)**
- + **< > Step along Beacons/Waypoints of a selected User**
- + **() Map Brightness +- 5%**
- + **/ zoom to Marker 1-2 Square**
- + **\ shortcut list**
- + **~ change track colour**
- + **+ Zoom in - Zoom out**
- + **. zoom to track and show only this (clicked before)**
- + **= same as . but with radio tracks**
- + **0 show all (and radio tracks off)**

- + **1,2,3,4 Zoom/Pan to stored Views**
- + **7,8,9 use map type as configured**
- + **ESC close menus**
- + **Cursor up/down/left/right move map, same as click near margin**
- + **SHIFT with up/down/left/right/ [zoom+]/[zoom-] in smaller steps**
- + **DEL delete selected (Symbol, Waypoint)**
- + **TAB switch between two Views**
- + **ctrl-L Reset Image and Mouse parameters to default**
- + **ctrl-V Paste**
- + **==[[DXL - APRSmap Download | Download]]==**
- + **[[Datei:Aprsmap-download.ipq | link=DXL - APRSmap Download]]**
- + **[[DXL - APRSmap Download | APRSmap Download]] - For Windows, Linux and ARM (Raspberry Pi)**

- ==Software==

The software is available for OS like
WINDOWS, LINUX and systems based on ARM structures like raspberry pi.

- ===Windows version==

* **[<http://oe5dxi.ampr.at> directly via HAMNET] with latest updates
"(HAMNET-connection required)"
**

* **or [[Media:Aprsmap-getmap.zip | direct Win32 download]] out of this Wiki
**

+ ==Further operation manual==

more information is up to come

Aktuelle Version vom 14. August 2021, 14:53 Uhr




Für die deutsche Version dieses Projekts >>[hier klicken](#)<<



APRSmap Download

APRSmap is a new APRS client software by OE5DXL, which is based on the [OSM](#) map source. It allows a lot of features in only one program by a good usability. NO installation is required, just put it on a disk an start it!

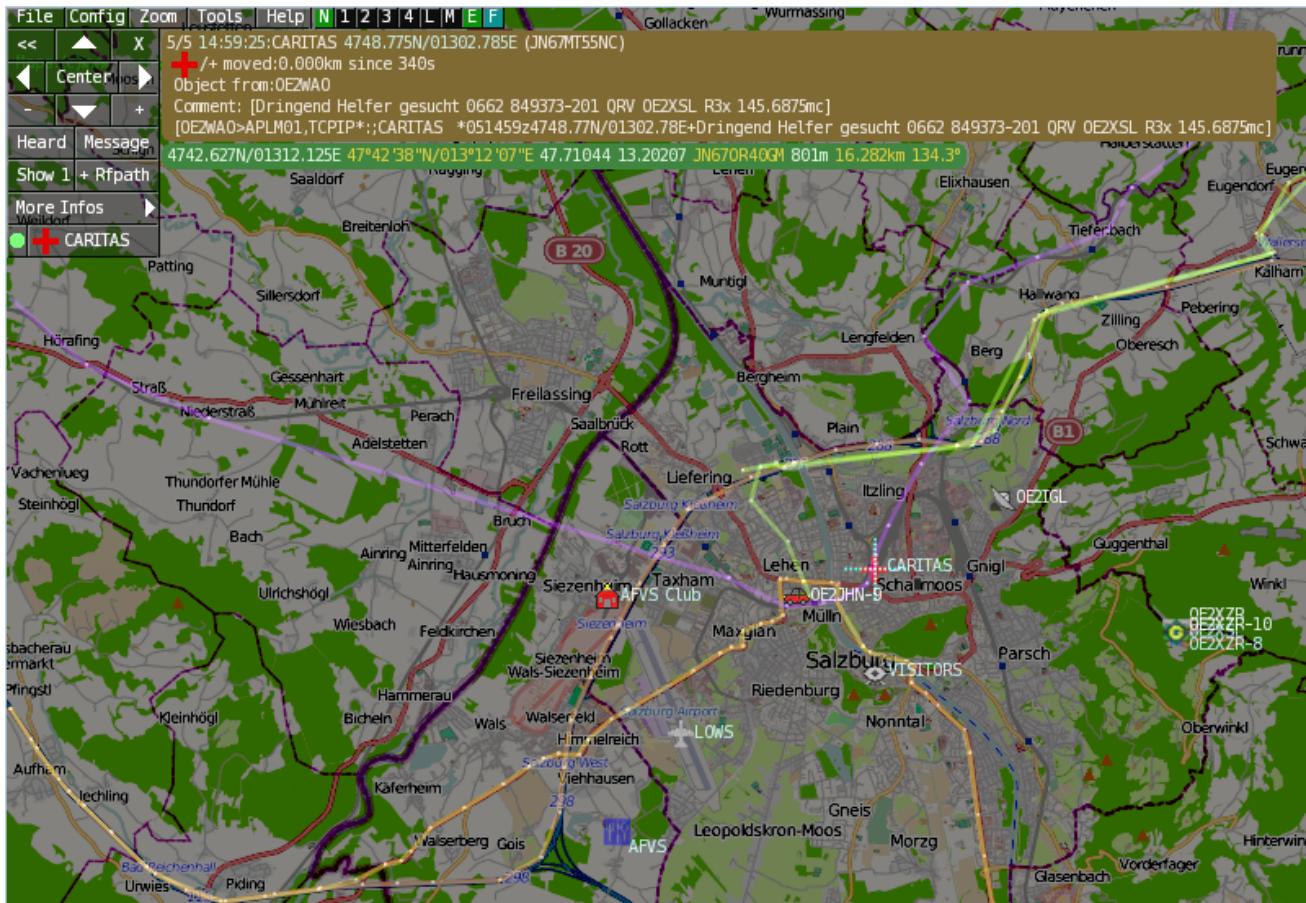

A lot of documentation work will have to be done soon !!

Inhaltsverzeichnis

1 Features	35
2 Installation	35
3 Operation manual and help	35
3.1 Shortcuts	36
4 Download	37
5 Further operation manual	37

Features

- OpenSource and already compiled for windows and linux
- 100% compliance with the current APRS protocol specifications
- No installation required, just copy and start
- No unnecessary menus, focus is on the representation
- IP-based, out-of-the-box network-ready in HAMNET and Internet
- Operations best controlled via shortcuts
- Local serial connection (TNC) possible - operating as an RF IGATE
- Several MapSources can be used. By default, this is OSM - OpenStreetMap
- Downloading map source on demand
- Track filter for delayed / late / repeated packets "f"
- Radio propagation calculation (since v0.36) "R"
- Animation of tracks with timeline "a"
- Animation of the temperature distribution "w"
- Messaging

Installation

After downloading the program you only have to extract the files into a subfolder of your program files folder, e.g. /APRSmap.

No installation routine is required, just extract and run the aprsmap.exe

Operation manual and help

[>> Operating instructions](#) - the help in handling the program



APRSmap 1st Start

On the first start of the program it is necessary to do some configuration. The most important things you have to adjust are in the ONLINE menu. You best configure all steps from up till down.

- First of all you put in your callsign (MY CALLSIGN) with optional SSID
- Second step is to choose your desired APRS icon (MY SYMBOL)
- Next you will zoom to your QTH as far as you can, 100% identifying your home (zoom level >16). Then open ONLINE - MY POSITION and point to your home with the cursor. While push and hold the SHIFT key click on your home. The coordinates will be copied into the MY POSITION field. Just click OK to save them.
- Now you can set the SERVER URL by just inserting your favorite APRS IS. Click ADD to save this entry.

```
for example:  
aprs.oe2xzr.apr.at (APRS IS connection via HAMNET)  
austria.aprs2.net (APRS IS connection via Internet)
```

- You also need to enter a valid APRS PASSCODE to transmit packets to the APRS network (not needed in case of only RX). Just do a internet search on APRS PASSCODE to find a possibility on getting your code.
- Last but not least you have to activate CONNECT SERVER to get data from an to the APRS network.

Shortcuts

```
: delete markers  
@ reset <On Next Click> to menu mode  
a Animate (Click to Map to set Parameters)  
b or <Backspace> go back in position history  
c Center (to last clicked Pixel)  
d toggle (missing) map download  
e toggle Errors only/All for stepping along a track with <>  
f Junk Filter toggle on/off  
h Heard (click symbol or text of igate before)  
i Internal Status Listing  
l toggle Labels on/off  
m toggle dimm not moving since 10min  
o toggle Objects/Items on/off  
p toggle mouse-over Hints  
q Quit Program  
r toggle Radio tracks on/off  
s toggle show only stations with a selected symbol  
u toggle tx/rx-Monitor window on/off  
w toggle WX stations and Temperature  
x set Marker 1 to mouse position  
y set Marker 2 and Line to Marker 1  
B Open Beacon editor  
C Enter Category of POI to be drawn on map  
D Digi Config open/close  
F Find Call (with wildcards * ?), Locator, Latitude/Longitude  
H Altitude Colour Map (if srtm-Data available)  
M Compose Message  
R toggle Radiorange Map on/off  
T toggle Timestamp  
S Screenshot bpm (win), png (linux)  
W Rain map (use topo or dark map)  
< > Step along Beacons/Waypoints of a selected User  
( ) Map Brightness +- 5%  
/ zoom to Marker 1-2 Square  
\ shortcut list  
~ change track colour  
+ Zoom in - Zoom out  
. zoom to track and show only this (clicked before)  
= same as . but with radio tracks  
0 show all (and radio tracks off)  
1,2,3,4 Zoom/Pan to stored Views  
7,8,9 use map type as configured  
ESC close menus
```

```
Cursor up/down/left/right move map, same as click near margin  
SHIFT with up/down/left/right/[zoom+]/[zoom-] in smaller steps  
DEL delete selected (Symbol, Waypoint)  
TAB switch between two Views  
ctrl-L Reset Image and Mouse parameters to default  
ctrl-V Paste
```

[Download](#)



APRSmap Download

[APRSmap Download](#) - For Windows, Linux and ARM (Raspberry Pi)

[Further operation manual](#)

more information is up to come

DXL - APRSmap englisch und DXL - APRSmap operating: Unterschied zwischen den Seiten

VisuellWikitext

Version vom 15. Juli 2014, 17:47 Uhr (Quelltext anzeigen)

OE2WAO (Diskussion | Beiträge)

K

Aktuelle Version vom 14. August 2021, 14:49 Uhr (Quelltext anzeigen)

OE2WAO (Diskussion | Beiträge)

Markierung: 2017-Quelltext-Bearbeitung

Zeile 1:

[[Kategorie:APRS]]

[[Datei:Deutschland-flagge.gif]] Für die deutsche Version dieses Projekts
[[DXL - APRSmap | >>hier klicken<<]]

APRSmap is a new APRS client software by OE5DXL, which is based on the [http://www.osm.org OSM] map source. It allows a lot of features in only one program by a good usability. NO installation is required, just put it on a disk an start it!

[[Datei:aprsmap.png]]

==Software==

Zeile 1:

[[Kategorie:APRS]]

==Program start==

After downloading and saving locally, the "'aprsmap.exe'" program can be started. A separate installation is not required.

==Operation==

====First steps====

[[Datei:Aprsmap-1st-start.jpg]]

On the first start of the program it is necessary to do some configuration. The most important things you have to adjust are in the ONLINE menu. You best configure all steps from up till down.

- The software is available for OS like **WINDOWS, LINUX** and systems based on **ARM structures like raspberry pi.**
- **====Windows version=====**
- * [http://oe5dxl.ampr.at directly via HAMNET] with latest updates "(HAMNET -connection required)"

* or [[Media:Aprsmap-getmap.zip | direct Win32 download]] out of this Wiki

- + *First of all you put in your callsign (**MY CALLSIGN**) with optional SSID
- + *Second step is to choose your desired APRS icon (**MY SYMBOL**)
- + *Next you will zoom to your QTH as far as you can, 100% identifying your home (zoom level >16). Then open **ONLINE - MY POSITION** and point to your home with the cursor. While push and hold the SHIFT key click on your home. The coordinates will be copied into the **MY POSITION** field. Just click OK to save them.
- + *Now you can set the SERVER URL by just inserting your favorite APRS IS. Click ADD to save this entry.
- +
- + **for example:**
- + **aprs.oe2xzr.ampr.at (APRS IS connection via HAMNET)**
- + **austria.aprs2.net (APRS IS connection via Internet)**
- +
- + *You also need to enter a valid APRS PASSCODE to transmit packets to the APRS network (not needed in case of only RX). Just do a internet search on APRS PASSCODE to find a possibility on getting your code.
- + *Last but not least you have to activate CONNECT SERVER to get data from an to the APRS network.
- +
- + **====Shortcuts====**

- + **Note, shortcut keys are case sensitive!**
- + **<nowiki>:</nowiki> delete markers**
- + **@ reset <On Next Click> to menu mode**
- + **a Animate (Click to Map to set Parameters)**
- + **b or <Backspace> go back in position history**
- + **c Center (to last clicked Pixel)**
- + **d toggle (missing) map download**
- + **e toggle Errors only/All for stepping along a track with <>**
- + **f Junk Filter toggle on/off**
- + **g Heard (click symbol or text of message before)**
- + **i Internal Status Listing**
- + **l toggle Labels on/off**
- + **m toggle dimm not moving since 10min**
- + **o toggle Objects/Items on/off**
- + **p toggle mouse-over Hints**
- + **q Quit Program**
- + **r toggle Radio tracks on/off**
- + **s toggle show only stations with a selected symbol**
- + **u toggle tx/rx-Monitor window on/off**
- + **w toggle WX stations and Temperature**
- + **x set Marker 1 to mouse position**
- + **y set Marker 2 and Line to Marker 1**
- + **B Open Beacon editor**

- + C Enter Category of POI to be drawn on map
- + D Digi Config open/close
- + F Find Call (with wildcards * ?), Locator, Latitude/Longitude
- + H Altitude Colour Map (if srtm-Data available)
- + M Compose Message
- + R toggle Radiorange Map on/off
- + T toggle Timestamp
- + S Screenshot bpm (win), png (linux)
- + W Rain map (use topo or dark map)
- + < > Step along Beacons/Waypoints of a selected User
- + () Map Brightness +- 5%
- + / zoom to Marker 1-2 Square
- + \ shortcut list
- + ~ change track colour
- + + Zoom in - Zoom out
 - + . zoom to track and show only this (clicked before)
 - + = same as . but with radio tracks
- + 0 show all (and radio tracks off)
- + 1,2,3,4 Zoom/Pan to stored Views
- + 7,8,9 use map type as configured
- + ESC close menus
- + Cursor up/down/left/right move map, same as click near margin
- + SHIFT with up/down/left/right/ [zoom+]/[zoom-] in smaller steps
- + DEL delete selected (Symbol, Waypoint)
- + TAB switch between two Views

- + **ctrl-L Reset Image and Mouse parameters to default**
- + **ctrl-V Paste**
- +
- + **====Tips & tricks=====**
- +
- + ***Animation: Click on the track of a moving object (e.g. car) and press the "a" key**
- + ***Temperature distribution: Two times "w" (w + w) shows a color distribution of the reported temperatures (sensible min. Zoom level 10 or less)**
- + ***The "0" (zero), ESC and ":" keys often help if you want to have everything displayed again after clicking on the filter or similar.**
- + ***"TAB" key toggles between two independent displays, similar to VFO "A" and "B".**
- +
- +
- + **==Menus==**
- + **[[Datei:Aprsmap-conf-online.PNG]]**
- +
- + **In addition to the main menus explained in more detail below, the menu offers further short menus on the right.**
- + **N Display or switching of the network status, green means connected, orange means not connected or connection problems. If the mouse pointer is moved over the menu, the connection status appears in the popup**

- + **1-4....Display or switch the UDP port connections**
- + **L display the log file data**
- + **M View the saved messages**
- + **F display or switching of the track filter (incorrect or implausible position packages)**
- + **O display or switch the display of pure objects**
- + **By the way, the mouse position display (green bar with coordinates) can be activated in the CONFIG> MAP PARAMETER> SHOW LOC OF MOUSE menu.**
- +
- + **====File====**
- + **====Import Log=====**
- + **Import a complete logfile.**
- +
- + **====Screenshot=====**
- + **Save a screenshot in your local user directory, e.g. map1.bmp (Win10 user directories are in the User\AppData folder e.g. C:\Users\User\AppData\Local\VirtualStore\Program Files (x86)\APRSmap)**
- +
- + **====Make Video=====**
- + **Save a video from e.g. a moving object in .y4m raw video format.**
- +
- + **====Write Log=====**
- + **Choose the logfile directory.**
- +
- + **====Keep Log Days=====**

- + **Define the amount of days logs are kept.**
- +
- + **====Quit=====**
- + **Exit APRSmap, shortcut key is q.**
- +
- + **====Config=====**
- + **====Brightness=====**
- + **Setting the respective brightness, times and colors.**
- + **Time Fade Out - time until the display of stations disappears after the time for display (full brightness) has expired**
- + **Time full Bright - time to display received positions**
- + **Brightness Waypoint - Brightness of the waypoint points**
- + **Brightness Text - Brightness of the station texts**
- + **Brightness Symbol - the brightness of the symbols displayed**
- + **Gamma - Gamma value setting of the card**
- + **Brightness Track - the brightness of the route**
- + **Brightness Map - the brightness of the map**
- + **Brightness Object - the brightness of the objects displayed**
- +
- + **====Online=====**
- + **The ONLINE area is initially the most important and necessary menu item, which has to be configured individually.**

- <u>Basically, when the program is simply started and a data connection is established, other stations can be receive even without specifying your own callsign, position or APRS passcode (RX only mode)</u>.
- + However, in order to act "actively" in the APRS network and to be seen and reached by other stations, this information must be entered accordingly. The "APRS PASScode" must be requested once. To do this, search for ""APRS PASSCODE Generator"" on the Internet.
- +
- + =====My Call=====
- + Here you enter the callsign to be used, optionally with SSID.
- + (without SSID) Your primary station usually fixed and message capable
- + -1 generic additional station, digi, mobile, wx, etc
- + -2 generic additional station, digi, mobile, wx, etc
- + -3 generic additional station, digi, mobile, wx, etc
- + -4 generic additional station, digi, mobile, wx, etc
- + -5 Other networks (Dstar, Iphones, Androids, Blackberry's etc)
- + -6 Special activity, Satellite ops, camping or 6 meters, etc
- + -7 walkie talkies, HT's or other human portable
- + -8 boats, sailboats, RV's or second main mobile
- + -9 Primary Mobile (usually message capable)

- + -10 internet, Iqates, echolink, winlink, AVRS, APRN, etc
- + -11 balloons, aircraft, spacecraft, etc
- + -12 APRStt, DTMF, RFID, devices, one-way trackers*, etc
- + -13 Weather stations
- + -14 Truckers or generally full time drivers
- + -15 generic additional station, digi, mobile, wx, etc
- +
 - * One-way trackers should best use the -12 one-way SSID indicator
 - + because the -9's usually mean a ham in full APRS communication both message and voice.
 - + The -9's can be contacted by APRS message or by Voice on his frequency included in his beacon, or on Voice Alert if he is in simplex range.
 - + The -12's are just moving Icons on the map and since they have no 2 way communication for ham radio they are not generally of routine interest to other operators.
 - +
 - + =====My Symbol=====
 - + Self-explanatory
 - +
 - + =====My Position=====
 - + In order to enter your own position in MY POSITION quickly and without any major search effort, simply go first with the zoom into the MAP (preferably ZOOMLEVEL 17) so that you can clearly see your own position. Then open the CONFIG - ONLINE - MY POSITION item and click

the SHIFT key to determine your own position. The coordinates are automatically adopted in the context menu and only need to be confirmed with OK.

+ =====Netbeaconcontext=====

+ The text set here is sent as beacon text via the network connection.

+

+ =====Passcode=====

An APRS PASSCODE is not absolutely necessary for RX, but this code is essential for sending your own data.

+ You can apply for this code online with a waiting period, simply search for APRS IS PASSCODE using the search engine.

+ =====Server URL=====

+ Any APRS server that provides the data in the correct format can be entered as the server URL.

+ for example:

+ `aprs.oe2xzr.aprsworld.net` (for connections via HAMNET)

+ `austria.aprs2.net` (for connections via Internet)

+ Another list can be found at

+ <http://www.aprs2.net/serverstats.php>

+

+ The standard port is 14580 and does not have to be specified.

+ Alternative ports are given after the address:

+ `aprs.server.com:12345`

+

+ =====Serverfilter=====

- + **Suggestion:** " ""m / 100 p / OE -t / t"" "
- +
The position filter is structured as follows [Position] / [Radius] eg " ""m / 100"" " for displaying data with a radius of 100km around your own position.
- +
" ""P / OE"" " is used to display all OE stations (e.g. mobile) outside the defined radius filter .
- +
And the mostly unnecessary telemetry traffic is filtered with " ""-t / t"" ".
- +
+ **"TIP"**
- +
settings relating to the server are only adopted when a new connection is made, for this the server connection can either be disconnected and re-established in the menu bar under "N". or the corresponding server entry can be deactivated and activated under "Config">> "Online">> "Connect Server"
.
- +

- +
+ **=====Connect Server=====**
- + Activates or deactivates the online connection.
- +
+ **=====Allow TX to NET=====**
- + Activates or deactivates the sending of (own) data to the online network.

- + **=====Allow Gate RF>NET=====**
Activates or deactivates the forwarding of APRS data heard locally via HF in the online network.
- + **=====RF-Ports=====**
- + **=====Timers=====**
- + **=====Map Parameter=====**
- + **=====Show Loc of Mouse=====**
Activates / deactivates the display of the coordinates, height and distance of the mouse pointer on the map.
- + **=====Trackfilter=====**
Activates / deactivates the intelligent filter function for incorrect or implausible position data (e.g. long lines across the APRS map; chopping or zik-zak in the track as if the route was driven several times - wheel cap lost - caused by a massive delay from Digs delivered packages)
- + **=====Show Scaler=====**
- + **=====Show Windvane=====**
Activates / deactivates the display of the wind vane at weather stations if this value was supplied.

- + =====Show Temp=====
- + Activates / deactivates the display of the temperature value at weather stations if this has been delivered.
- +
- + =====Load Map Program=====
- + Deactivates / activates the card loader. Optionally, the loading program can be selected by clicking on the menu, optionally
- + getosm "(standard, activates the external program getosm.exe from OE5KRN) " "* recommended"
- + start sh map.sh "(loading maps in the background)"
- + sh qm.sh "(for map download from the Internet)"
- + sh qm-hamnet.sh "(for" map download "from HAMNET)"
- +
- + =====km/h Text=====
- + Freely selectable text of the unit for displaying the speed of moving stations. Default "km / h", can be shortened to "km", for example, to save space.
- + =====Show Altitude min m=====
- +
- + =====Brightness Notmover=====
- +
- + =====Reset to Default=====
- +
- + =====Map Moving=====
- +
- + =====Colours, Font=====

- + **====Callfilters=====**
- + **====Watch Calls=====**
- + **====Reload Config=====**
- + **====Save Config=====**
- + **====Zoom=====**
- + **====Tools=====**
- + **====Toolbar Off=====**
 - + Deactivates the permanently displayed toolbar. The toolbar can then be opened dynamically with a click on the map.
- + **====On next Click=====**
- + **====List=====**
- + **====Choose Maps=====**
- + **=====Reload=====**
- + **=====Download=====**
- + **=====tiles_quest=====**
- + **=====tiles_sat=====**

+ =====tiles_cyclemap [9]=====

+

+ =====tiles_topo [8]=====

+

+ =====tiles [7]=====

+

+ =====Find=====

+

+ =====Radiolink=====

+

+ =====Select Data=====

+ =====Symbol=====

**When the display is activated
(marked by * next to SYMBOL) only
the selected symbols are displayed.
These can be switched on / off by
clicking on the respective symbols
(multiple selection possible). The
entire function can be switched on /
off by clicking on the wording
SYMBOL.**

+ =====Dimm Notmover=====

**With the on / off switch, it clearly
dims the stationary stations and
objects in relation to, for example,
mobile stations.**

+

+ =====Rain Colourmap=====

+

+ =====Temp Colourmap=====

**Shows a temperature distribution
(similar to an isobar map). Shortcut
2x "w". Exit the Colourmap view with
ESC or key w again**

+

- + =====WX Stations=====
- +
- + =====Show POI=====
- +
- + =====Show All=====
- +
- + =====Add Maptypes=====
- +
- + =====Map directory=====
- +
- + =====Send Message=====
- + Opens the message context menu
- +
- + =====Animate=====
- +
- + ===Help==
- + =====Version=====
- + Shows the currently installed version
of APRSmap.
- + The letter in brackets indicates the
operating system, followed by the
version number of the software.
- + aprsmap(w) 0.79 by OE5DXL
- +
- + =====Helptext=====
- + Opens the program-internal help
context.
- +
- +
- + [[DXL - APRSmap englisch | << Back
to DXL - APRSmap overview]]

Aktuelle Version vom 14. August 2021, 14:49 Uhr**Inhaltsverzeichnis**

1 Program start	56
2 Operation	56
2.1 First steps	56
2.2 Shortcuts	56
2.3 Tips & tricks	57
3 Menus	58
3.1 File	58
3.1.1 Import Log	58
3.1.2 Screenshot	58
3.1.3 Make Video	58
3.1.4 Write Log	58
3.1.5 Keep Log Days	59
3.1.6 Quit	59
3.2 Config	59
3.2.1 Brightness	59
3.2.2 Online	59
3.2.2.1 My Call	59
3.2.2.2 My Symbol	60
3.2.2.3 My Position	60
3.2.2.4 Netbeaconcontext	60
3.2.2.5 Passcode	60
3.2.2.6 Server URL	60
3.2.2.7 Serverfilter	60
3.2.2.8 Connect Server	61
3.2.2.9 Allow TX to NET	61
3.2.2.10 Allow Gate RF>NET	61
3.2.3 RF-Ports	61
3.2.4 Timers	61
3.2.5 Map Parameter	61
3.2.5.1 Show Loc of Mouse	61
3.2.5.2 Trackfilter	61
3.2.5.3 Show Scaler	61
3.2.5.4 Show Windvane	61
3.2.5.5 Show Temp	62
3.2.5.6 Load Map Program	62
3.2.5.7 km/h Text	62
3.2.5.8 Show Altitude min m	62
3.2.5.9 Brightness Notmover	62

3.2.5.10 Reset to Default	62
3.2.6 Map Moving	62
3.2.7 Colours, Font	62
3.2.8 Callfilters	62
3.2.9 Watch Calls	62
3.2.10 Reload Config	62
3.2.11 Save Config	62
3.3 Zoom	62
3.4 Tools	62
3.4.1 Toolbar Off	62
3.4.2 On next Click	63
3.4.3 List	63
3.4.4 Choose Maps	63
3.4.4.1 Reload	63
3.4.4.2 Download	63
3.4.4.3 tiles_quest	63
3.4.4.4 tiles_sat	63
3.4.4.5 tiles_cyclemap [9]	63
3.4.4.6 tiles_topo [8]	63
3.4.4.7 tiles [7]	63
3.4.5 Find	63
3.4.6 Radiolink	63
3.4.7 Select Data	63
3.4.7.1 Symbol	63
3.4.7.2 Dimm Notmover	63
3.4.7.3 Rain Colourmap	63
3.4.7.4 Temp Colourmap	63
3.4.7.5 WX Stations	64
3.4.7.6 Show POI	64
3.4.7.7 Show All	64
3.4.8 Add Maptypes	64
3.4.9 Map directory	64
3.4.10 Send Message	64
3.4.11 Animate	64
3.5 Help	64
3.5.1 Version	64
3.5.2 Helptext	64

Program start

After downloading and saving locally, the **aprsmap.exe** program can be started. A separate installation is not required.

Operation

First steps



APRSmap 1st Start

On the first start of the program it is necessary to do some configuration. The most important things you have to adjust are in the ONLINE menu. You best configure all steps from up till down.

- First of all you put in your callsign (MY CALLSIGN) with optional SSID
- Second step is to choose your desired APRS icon (MY SYMBOL)
- Next you will zoom to your QTH as far as you can, 100% identifying your home (zoom level >16). Then open ONLINE - MY POSITION and point to your home with the cursor. While push and hold the SHIFT key click on your home. The coordinates will be copied into the MY POSITION field. Just click OK to save them.
- Now you can set the SERVER URL by just inserting your favorite APRS IS. Click ADD to save this entry.

for example:

aprs.oe2xzr.ampr.at (APRS IS connection via HAMNET)
austria.aprs2.net (APRS IS connection via Internet)

- You also need to enter a valid APRS PASSCODE to transmit packets to the APRS network (not needed in case of only RX). Just do a internet search on APRS PASSCODE to find a possibility on getting your code.
- Last but not least you have to activate CONNECT SERVER to get data from an to the APRS network.

Shortcuts

Note, shortcut keys are case sensitive!

```
: delete markers
@ reset <On Next Click> to menu mode
a Animate (Click to Map to set Parameters)
b or <Backspace> go back in position history
c Center (to last clicked Pixel)
d toggle (missing) map download
e toggle Errors only/All for stepping along a track with <>
f Junk Filter toggle on/off
h Heard (click symbol or text of igate before)
i Internal Status Listing
l toggle Labels on/off
m toggle dimm not moving since 10min
o toggle Objects/Items on/off
p toggle mouse-over Hints
q Quit Program
```

```
r toggle Radio tracks on/off
s toggle show only stations with a selected symbol
u toggle tx/rx-Monitor window on/off
w toggle WX stations and Temperature
x set Marker 1 to mouse position
y set Marker 2 and Line to Marker 1
B Open Beacon editor
C Enter Category of POI to be drawn on map
D Digi Config open/close
F Find Call (with wildcards * ?), Locator, Latitude/Longitude
H Altitude Colour Map (if srtm-Data available)
M Compose Message
R toggle Radiorange Map on/off
T toggle Timestamp
S Screenshot bpm (win), png (linux)
W Rain map (use topo or dark map)
< > Step along Beacons/Waypoints of a selected User
( ) Map Brightness +- 5%
/ zoom to Marker 1-2 Square
\ shortcut list
~ change track colour
+ Zoom in - Zoom out
. zoom to track and show only this (clicked before)
= same as . but with radio tracks
0 show all (and radio tracks off)
1,2,3,4 Zoom/Pan to stored Views
7,8,9 use map type as configured
ESC close menus
Cursor up/down/left/right move map, same as click near margin
SHIFT with up/down/left/right/[zoom+]/[zoom-] in smaller steps
DEL delete selected (Symbol, Waypoint)
TAB switch between two Views
ctrl-L Reset Image and Mouse parameters to default
ctrl-V Paste
```

Tips & tricks

- Animation: Click on the track of a moving object (e.g. car) and press the "a" key
- Temperature distribution: Two times "w" (w + w) shows a color distribution of the reported temperatures (sensible min. Zoom level 10 or less)
- The "0" (zero), ESC and ":" keys often help if you want to have everything displayed again after clicking on the filter or similar.
- "TAB" key toggles between two independent displays, similar to VFO "A" and "B".

Menus



In addition to the main menus explained in more detail below, the menu offers further short menus on the right.

N Display or switching of the network status, green means connected, orange means not connected or connection problems. If the mouse pointer is moved over the menu, the connection status appears in the popup
 1-4....Display or switch the UDP port connections
 L display the log file data
 M View the saved messages
 F display or switching of the track filter (incorrect or implausible position packages)
 O display or switch the display of pure objects

By the way, the mouse position display (green bar with coordinates) can be activated in the CONFIG> MAP PARAMETER> SHOW LOC OF MOUSE menu.

File

Import Log

Import a complete logfile.

Screenshot

Save a screenshot in your local user directory, e.g. map1.bmp (Win10 user directories are in the User\AppData folder e.g. C:\Users\User\AppData\Local\VirtualStore\Program Files (x86)\APRSmap)

Make Video

Save a video from e.g. a moving object in .y4m raw video format.

Write Log

Choose the logfile directory.

Keep Log Days

Define the amount of days logs are kept.

Quit

Exit APRSmap, shortcut key is q.

Config

Brightness

Setting the respective brightness, times and colors.

Time Fade Out - time until the display of stations disappears after the time for display (full brightness) has expired
Time full Bright - time to display received positions
Brightness Waypoint - Brightness of the waypoint points
Brightness Text - Brightness of the station texts
Brightness Symbol - the brightness of the symbols displayed
Gamma - Gamma value setting of the card
Brightness Track - the brightness of the route
Brightness Map - the brightness of the map
Brightness Object - the brightness of the objects displayed

Online

The ONLINE area is initially the most important and necessary menu item, which has to be configured individually. Basically, when the program is simply started and a data connection is established, other stations can receive even without specifying your own callsign, position or APRS passcode (RX only mode). However, in order to act "actively" in the APRS network and to be seen and reached by other stations, this information must be entered accordingly. The *APRS PASScode* must be requested once. To do this, search for "*APRS PASSCODE Generator*" on the Internet.

My Call

Here you enter the callsign to be used, optionally with SSID.

(without SSID) Your primary station usually fixed and message capable
-1 generic additional station, digi, mobile, wx, etc
-2 generic additional station, digi, mobile, wx, etc
-3 generic additional station, digi, mobile, wx, etc
-4 generic additional station, digi, mobile, wx, etc
-5 Other networks (Dstar, Iphones, Androids, Blackberry's etc)
-6 Special activity, Satellite ops, camping or 6 meters, etc
-7 walkie talkies, HT's or other human portable
-8 boats, sailboats, RV's or second main mobile
-9 Primary Mobile (usually message capable)
-10 internet, Igates, echolink, winlink, AVRS, APRN, etc
-11 balloons, aircraft, spacecraft, etc
-12 APRStt, DTMF, RFID, devices, one-way trackers*, etc
-13 Weather stations
-14 Truckers or generally full time drivers
-15 generic additional station, digi, mobile, wx, etc

* One-way trackers should best use the -12 one-way SSID indicator because the -9's usually mean a ham in full APRS communication both message and voice. The -9's can be contacted by APRS message or by Voice on his frequency included in his beacon, or on Voice Alert if he is in simplex range. The -12's are just moving Icons on the map and since they have no 2 way communication for ham radio they are not generally of routine interest to other operators.

My Symbol

Self-explanatory

My Position

In order to enter your own position in MY POSITION quickly and without any major search effort, simply go first with the zoom into the MAP (preferably ZOOMLEVEL 17) so that you can clearly see your own position. Then open the CONFIG - ONLINE - MY POSITION item and click the SHIFT key to determine your own position. The coordinates are automatically adopted in the context menu and only need to be confirmed with OK.

Netbeacontext

The text set here is sent as beacon text via the network connection.

Passcode

An APRS PASSCODE is not absolutely necessary for RX, but this code is essential for sending your own data. You can apply for this code online with a waiting period, simply search for APRS IS PASSCODE using the search engine.

Server URL

Any APRS server that provides the data in the correct format can be entered as the server URL.

for example:

aprs.oe2xzr.aprsr.at (for connections via HAMNET)
austria.aprs2.net (for connections via Internet)

Another list can be found at <http://www.aprs2.net/serverstats.php>.

The standard port is 14580 and does not have to be specified.

Alternative ports are given after the address:
aprs.server.com:12345

Serverfilter

Suggestion: " **m / 100 p / OE -t / t** "

The position filter is structured as follows [Position] / [Radius] eg " **m / 100** " for displaying data with a radius of 100km around your own position.

" **P / OE** " is used to display all OE stations (e.g. mobile) outside the defined radius filter .

And the mostly unnecessary telemetry traffic is filtered with " **-t / t** ".

TIP

settings relating to the server are only adopted when a new connection is made, for this the server connection can either be disconnected and re-established in the menu bar under "N", or the corresponding server entry can be deactivated and activated under "Config">> "Online">> "Connect Server" .

Connect Server

Activates or deactivates the online connection.

Allow TX to NET

Activates or deactivates the sending of (own) data to the online network.

Allow Gate RF>NET

Activates or deactivates the forwarding of APRS data heard locally via HF in the online network.

RF-Ports

Timers

Map Parameter

Show Loc of Mouse

Activates / deactivates the display of the coordinates, height and distance of the mouse pointer on the map.

Trackfilter

Activates / deactivates the intelligent filter function for incorrect or implausible position data (e.g. long lines across the APRS map; chopping or zik-zak in the track as if the route was driven several times - wheel cap lost - caused by a massive delay from Digi's delivered packages)

Show Scaler

Show Windvane

Activates / deactivates the display of the wind vane at weather stations if this value was supplied.

Show Temp

Activates / deactivates the display of the temperature value at weather stations if this has been delivered.

Load Map Program

Deactivates / activates the card loader. Optionally, the loading program can be selected by clicking on the menu, optionally

```
getosm (standard, activates the external program getosm.exe from OE5KRN) *  
recommended  
start sh map.sh (loading maps in the background)  
sh gm.sh (for map download from the Internet)  
sh gm-hamnet.sh (for map download from HAMNET)
```

km/h Text

Freely selectable text of the unit for displaying the speed of moving stations. Default "km / h", can be shortened to "km", for example, to save space.

Show Altitude min m

Brightness Notmover

Reset to Default

Map Moving

Colours, Font

Callfilters

Watch Calls

Reload Config

Save Config

Zoom

Tools

Toolbar Off

Deactivates the permanently displayed toolbar. The toolbar can then be opened dynamically with a click on the map.

On next Click

List

Choose Maps

Reload

Download

tiles_quest

tiles_sat

tiles_cyclemap [9]

tiles_topo [8]

tiles [7]

Find

Radiolink

Select Data

Symbol

When the display is activated (marked by * next to SYMBOL) only the selected symbols are displayed. These can be switched on / off by clicking on the respective symbols (multiple selection possible). The entire function can be switched on / off by clicking on the wording SYMBOL.

Dimm Notmover

With the on / off switch, it clearly dims the stationary stations and objects in relation to, for example, mobile stations.

Rain Colourmap

Temp Colourmap

Shows a temperature distribution (similar to an isobar map). Shortcut 2x "w". Exit the Colourmap view with ESC or key w again

WX Stations

Show POI

Show All

Add Maptypes

Map directory

Send Message

Opens the message context menu

Animate

Help

Version

Shows the currently installed version of APRSmap. The letter in brackets indicates the operating system, followed by the version number of the software.

```
aprsm(w) 0.79 by OE5DXL
```

Helptext

Opens the program-internal help context.

[**<< Back to DXL - APRSmap overview**](#)