

Inhaltsverzeichnis

1. TCE Tinycore Linux Project englisch	13
2. Benutzer:OE2WAO	5
3. Geeignete Soundkarten	9

TCE Tyncore Linux Project englisch

[Versionsgeschichte interaktiv durchsuchen](#)
[Visuell Wikitext](#)

Version vom 12. September 2013, 21:54 Uhr (Quelltext anzeigen)
 OE2WAO ([Diskussion](#) | [Beiträge](#))
 (→[Software](#))
 ← [Zum vorherigen Versionsunterschied](#)

Version vom 13. Januar 2014, 22:29 Uhr (Quelltext anzeigen)
 OE2WAO ([Diskussion](#) | [Beiträge](#))
[Zum nächsten Versionsunterschied](#) →

Zeile 35:

A ready-to-use software image is located on the [http://www.oe2wao.info/tce OE2WAO Server] (e.g. tc455x-128.zip means version 4.55 with GUI on 128MB data drive)

There is also a version for raspberry pi hardware in test, and available soon.

==Help==

If you need help on configuring the software packages you can contact OE5DXL on packet radio convers channel 44 or 4711.

Zeile 35:

A ready-to-use software image is located on the [http://www.oe2wao.info/tce OE2WAO Server] (e.g. tc455x-128.zip means version 4.55 with GUI on 128MB data drive)

There is also a version for raspberry pi hardware in test, and available soon.

- +
- + **===Software schematic===**
- + **[[Datei:Udpboxs.jpg]]**

==Help==

If you need help on configuring the software packages you can contact OE5DXL on packet radio convers channel 44 or 4711.

Version vom 13. Januar 2014, 22:29 Uhr

Inhaltsverzeichnis

1 Intro	15
2 Hardware	15
2.1 Connections and conversion of the used industrial pc	15
2.2 Soundcard	16
3 Software	16
3.1 Software schematic	16
4 Help	16

Intro


This hamradio software project is based on [TCE - Tinycore Linux](#), an embedded software system used on platforms like industrial pc, ALIX and others, and offers services and possibilities like

- packet radio,
- APRS,
- lightning log,
- small webserver,
- SVX-Link (Echolink)

especially in networks like HAMNET and similar.

One goal is a minimum on material expenditure and also a minimal current consumption, followed by a maximum of features

More information on the hamradio TCE - tinycore linux project coming here soon

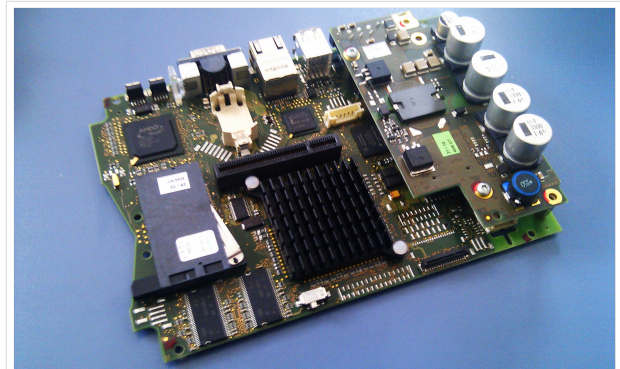


500MHz LowPower industrial PC

Hardware

DH2IW Wolfgang, OE2WAO Mike and OE5DXL Chris are doing first experiments with discarded industrial pc hardware, a 500MHz AMD Geode CPU with up to 256MB of RAM, and a minimal power input of <5Watt (for remaining stock ask [OE2WAO](#)).

But every other hardware platform like ALIX or similar will do.

The operating system is placed on a CF memory card (>32MB).

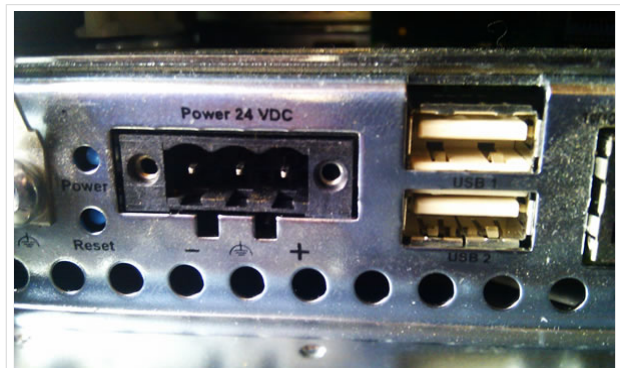

polarity industrial PC

A USB soundcard is used for AFSK mods. One special character of working devices is a 3rd connector beside microphone and line out, the line in. Because these device are real stereo and make it possible to operate two separate channels on one sound card.

Connections and conversion of the used industrial pc

There are several connectors (COM, USB, network) on the frontside of our panels, as you can see. For correct polarity it is important to connent the + pole to the right pin of the 3pol power supply connector, the pin which is closer to the USB ports. The negative pole is the left pin.

The normal board supply is 24V.

That we can use it with our 12V power supply, we have to do a little modification. Just add a 270k Ohm resistor on the bottom side of the power supply as shown in the picture.



Soundcard


If there is no onboard sound available, you can use a USB soundcard instead. Suggested types you can find [here](#).

Software

A ready-to-use software image is located on the [OE2WAO Server](#) (e.g. tc455x-128.zip means version 4.55 with GUI on 128MB data drive)

There is also a version for raspberry pi hardware in test, and available soon.

Software schematic

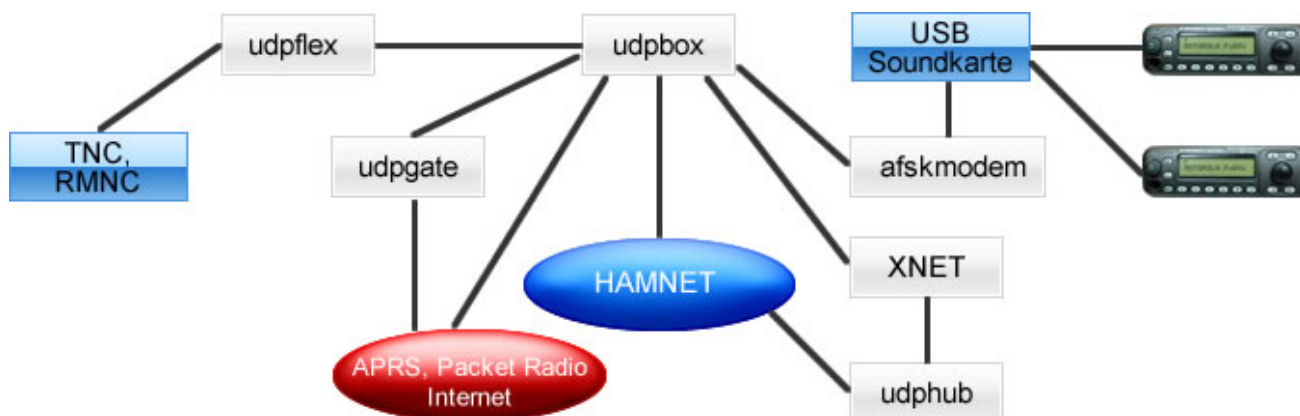

Help

If you need help on configuring the software packages you can contact OE5DXL on packet radio convers channel 44 or 4711.

TCE Tyncore Linux Project englisch: Unterschied zwischen den Versionen

[Versionsgeschichte interaktiv durchsuchen](#)
[Visuell Wikitext](#)

Version vom 12. September 2013, 21:54 Uhr (Quelltext anzeigen)
 OE2WAO ([Diskussion](#) | [Beiträge](#))
 (→[Software](#))
[← Zum vorherigen Versionsunterschied](#)

Version vom 13. Januar 2014, 22:29 Uhr (Quelltext anzeigen)
 OE2WAO ([Diskussion](#) | [Beiträge](#))
[Zum nächsten Versionsunterschied →](#)

Zeile 35:

A ready-to-use software image is located on the [http://www.oe2wao.info/tce OE2WAO Server] (e.g. tc455x-128.zip means version 4.55 with GUI on 128MB data drive)

There is also a version for raspberry pi hardware in test, and available soon.

Zeile 35:

A ready-to-use software image is located on the [http://www.oe2wao.info/tce OE2WAO Server] (e.g. tc455x-128.zip means version 4.55 with GUI on 128MB data drive)

There is also a version for raspberry pi hardware in test, and available soon.

+

+

+

===Software schematic===

[[Datei:Udpboxs.jpg]]

==Help==

If you need help on configuring the software packages you can contact OE5DXL on packet radio convers channel 44 or 4711.

==Help==

If you need help on configuring the software packages you can contact OE5DXL on packet radio convers channel 44 or 4711.

Version vom 13. Januar 2014, 22:29 Uhr

Inhaltsverzeichnis


1	Intro	7
2	Hardware	7
2.1	Connections and conversion of the used industrial pc	7
2.2	Soundcard	8
3	Software	8
3.1	Software schematic	8

4 Help	8
--------------	---

Intro

This hamradio software project is based on [TCE - Tinycore Linux](#), an embedded software system used on platforms like industrial pc, ALIX and others, and offers services and possibilities like

- packet radio,
- APRS,
- lightning log,
- small webserver,
- SVX-Link (Echolink)

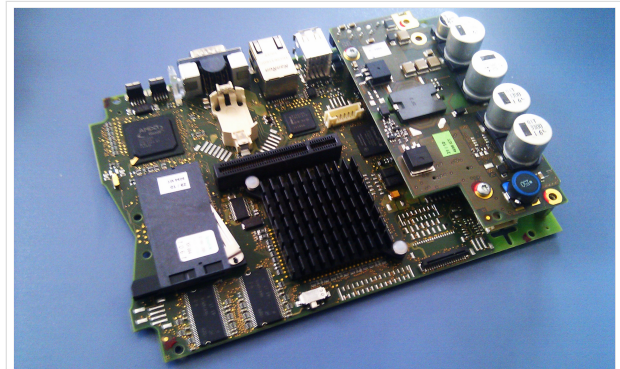

500MHz LowPower industrial PC

especially in networks like HAMNET and similar.

One goal is a minimum on material expenditure and also a minimal current consumption, followed by a maximum of features


More information on the hamradio TCE - tinycore linux project coming here soon

Hardware

DH2IW Wolfgang, OE2WAO Mike and OE5DXL Chris are doing first experiments with discarded industrial pc hardware, a 500MHz AMD Geode CPU with up to 256MB of RAM, and a minimal power input of <5Watt (for remaining stock ask [OE2WAO](#)).

But every other hardware platform like ALIX or similar will do.

The operating system is placed on a CF memory card (>32MB).

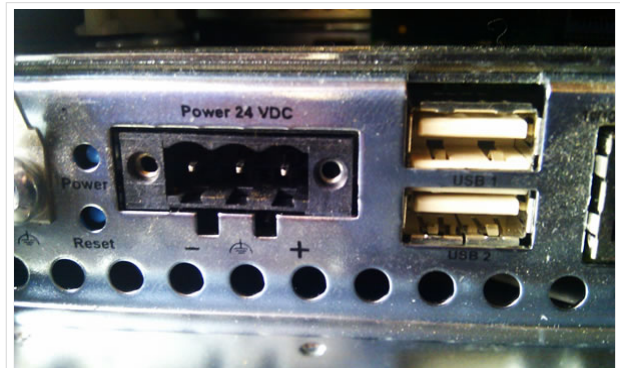

polarity industrial PC

A USB soundcard is used for AFSK mods. One

special character of working devices is a 3rd connector beside microphone and line out, the line in. Because these device are real stereo and make it possible to operate two separate channels on one sound card.

Connections and conversion of the used industrial pc

There are several connectors (COM, USB, network) on the frontside of our panels, as you can see. For correct polarity it is important to connent the + pole to the right pin of the 3pol power supply connector, the pin which is closer to the USB ports. The negative pole is the left pin.

The normal board supply is 24V.

That we can use it with our 12V power supply, we have to do a little modification. Just add a 270k Ohm resistor on the bottom side of the power supply as shown in the picture.



Soundcard


If there is no onboard sound available, you can use a USB soundcard instead. Suggested types you can find [here](#).

Software

A ready-to-use software image is located on the [OE2WAO Server](#) (e.g. tc455x-128.zip means version 4.55 with GUI on 128MB data drive)

There is also a version for raspberry pi hardware in test, and available soon.

Software schematic

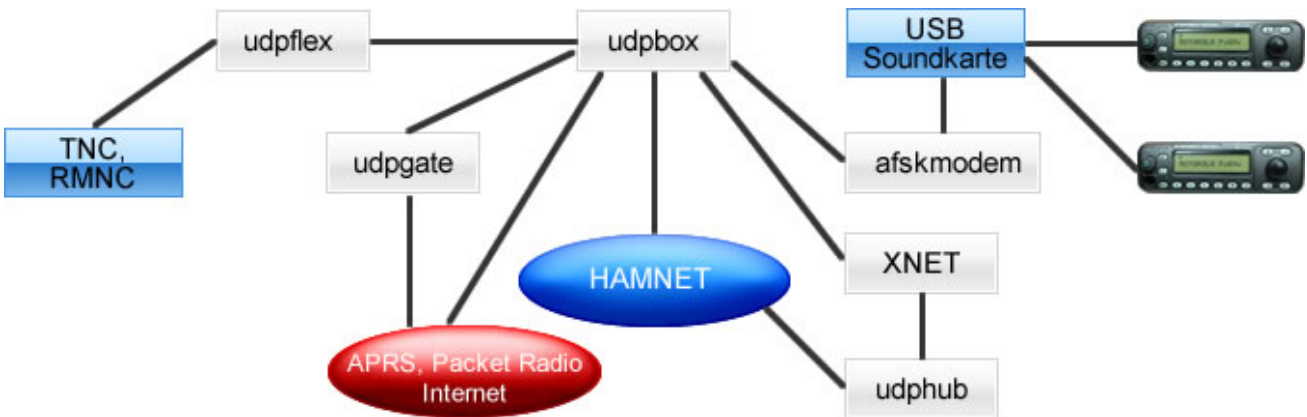

Help

If you need help on configuring the software packages you can contact OE5DXL on packet radio convers channel 44 or 4711.

TCE Tyncore Linux Project englisch: Unterschied zwischen den Versionen

[Versionsgeschichte interaktiv durchsuchen](#)
[Visuell Wikitext](#)

Version vom 12. September 2013, 21:54 Uhr (Quelltext anzeigen)
 OE2WAO ([Diskussion](#) | [Beiträge](#))
 (→[Software](#))
[← Zum vorherigen Versionsunterschied](#)

Version vom 13. Januar 2014, 22:29 Uhr (Quelltext anzeigen)
 OE2WAO ([Diskussion](#) | [Beiträge](#))
[Zum nächsten Versionsunterschied →](#)

Zeile 35:

A ready-to-use software image is located on the [http://www.oe2wao.info/tce OE2WAO Server] (e.g. tc455x-128.zip means version 4.55 with GUI on 128MB data drive)

There is also a version for raspberry pi hardware in test, and available soon.

==Help==

If you need help on configuring the software packages you can contact OE5DXL on packet radio convers channel 44 or 4711.

Zeile 35:

A ready-to-use software image is located on the [http://www.oe2wao.info/tce OE2WAO Server] (e.g. tc455x-128.zip means version 4.55 with GUI on 128MB data drive)

There is also a version for raspberry pi hardware in test, and available soon.

+

+++**Software schematic**+++

+++**[[Datei:Udpboxs.jpg]]**+++

==Help==

If you need help on configuring the software packages you can contact OE5DXL on packet radio convers channel 44 or 4711.

Version vom 13. Januar 2014, 22:29 Uhr

Inhaltsverzeichnis

1 Intro	11
2 Hardware	11
2.1 Connections and conversion of the used industrial pc	11
2.2 Soundcard	12
3 Software	12
3.1 Software schematic	12

4 Help	12
--------------	----

Intro


This hamradio software project is based on [TCE - Tinycore Linux](#), an embedded software system used on platforms like industrial pc, ALIX and others, and offers services and possibilities like

- packet radio,
- APRS,
- lightning log,
- small webserver,
- SVX-Link (Echolink)

especially in networks like HAMNET and similar.

One goal is a minimum on material expenditure and also a minimal current consumption, followed by a maximum of features

More information on the hamradio TCE - tinycore linux project coming here soon

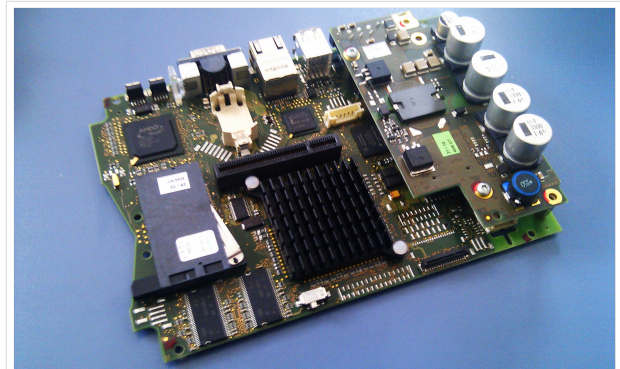


500MHz LowPower industrial PC

Hardware

DH2IW Wolfgang, OE2WAO Mike and OE5DXL Chris are doing first experiments with discarded industrial pc hardware, a 500MHz AMD Geode CPU with up to 256MB of RAM, and a minimal power input of <5Watt (for remaining stock ask [OE2WAO](#)).

But every other hardware platform like ALIX or similar will do.

The operating system is placed on a CF memory card (>32MB).

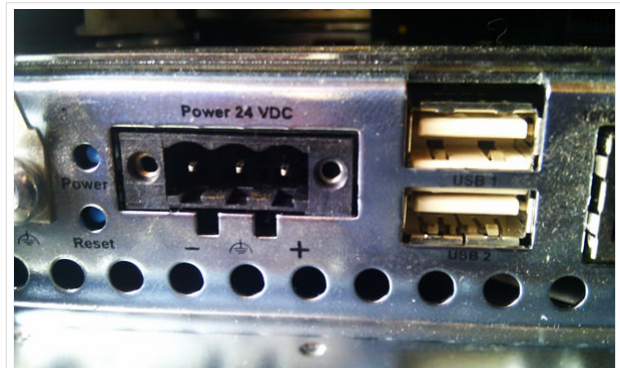

polarity industrial PC

A USB soundcard is used for AFSK mods. One


special character of working devices is a 3rd connector beside microphone and line out, the line in. Because these device are real stereo and make it possible to operate two separate channels on one sound card.

Connections and conversion of the used industrial pc

There are several connectors (COM, USB, network) on the frontside of our panels, as you can see. For correct polarity it is important to connent the + pole to the right pin of the 3pol power supply connector, the pin which is closer to the USB ports. The negative pole is the left pin.

The normal board supply is 24V.

That we can use it with our 12V power supply, we have to do a little modification. Just add a 270k Ohm resistor on the bottom side of the power supply as shown in the picture.

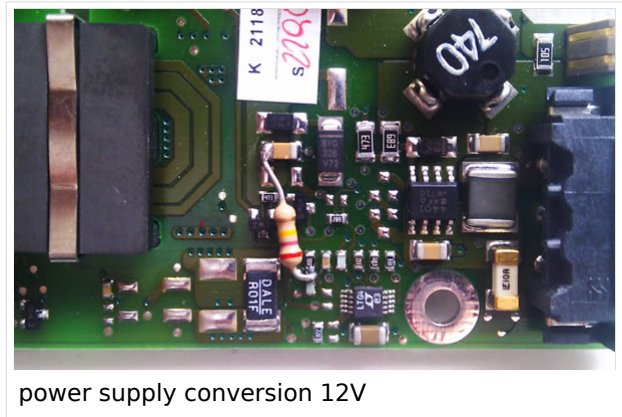

Soundcard


If there is no onboard sound available, you can use a USB soundcard instead. Suggested types you can find [here](#).

Software

A ready-to-use software image is located on the [OE2WAO Server](#) (e.g. tc455x-128.zip means version 4.55 with GUI on 128MB data drive)

There is also a version for raspberry pi hardware in test, and available soon.

Software schematic

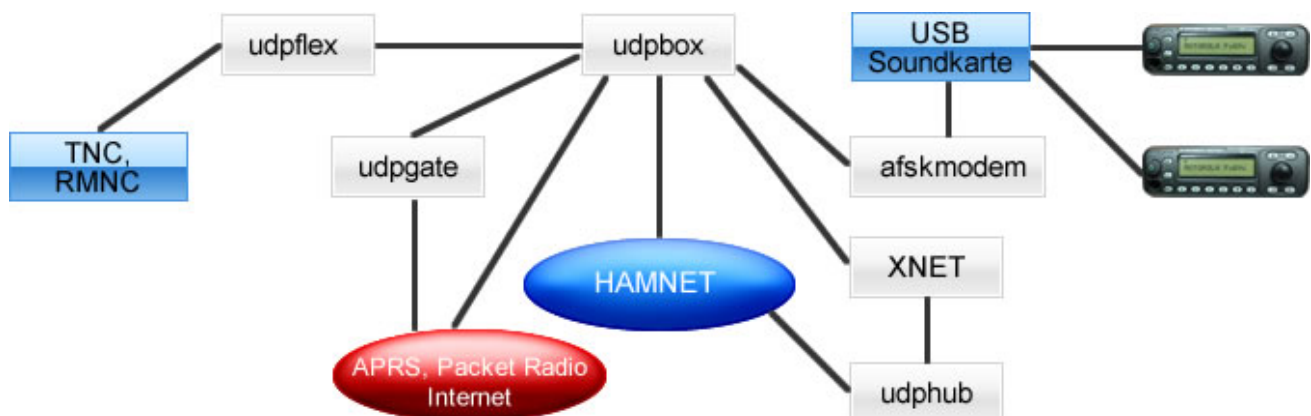

Help

If you need help on configuring the software packages you can contact OE5DXL on packet radio convers channel 44 or 4711.

TCE Tyncore Linux Project englisch: Unterschied zwischen den Versionen

[Versionsgeschichte interaktiv durchsuchen](#)
[Visuell Wikitext](#)

Version vom 12. September 2013, 21:54 Uhr (Quelltext anzeigen)
 OE2WAO ([Diskussion](#) | [Beiträge](#))
 (→[Software](#))
[← Zum vorherigen Versionsunterschied](#)

Version vom 13. Januar 2014, 22:29 Uhr (Quelltext anzeigen)
 OE2WAO ([Diskussion](#) | [Beiträge](#))
[Zum nächsten Versionsunterschied →](#)

Zeile 35:

A ready-to-use software image is located on the [http://www.oe2wao.info/tce OE2WAO Server] (e.g. tc455x-128.zip means version 4.55 with GUI on 128MB data drive)

There is also a version for raspberry pi hardware in test, and available soon.

==Help==

If you need help on configuring the software packages you can contact OE5DXL on packet radio convers channel 44 or 4711.

Zeile 35:

A ready-to-use software image is located on the [http://www.oe2wao.info/tce OE2WAO Server] (e.g. tc455x-128.zip means version 4.55 with GUI on 128MB data drive)

There is also a version for raspberry pi hardware in test, and available soon.

+

+++Software schematic+++

++[[Datei:Udpboxs.jpg]]

==Help==

If you need help on configuring the software packages you can contact OE5DXL on packet radio convers channel 44 or 4711.

Version vom 13. Januar 2014, 22:29 Uhr

Inhaltsverzeichnis

1	Intro	15
2	Hardware	15
2.1	Connections and conversion of the used industrial pc	15
2.2	Soundcard	16
3	Software	16
3.1	Software schematic	16

4 Help	16
--------------	----

Intro


This hamradio software project is based on [TCE - Tinycore Linux](#), an embedded software system used on platforms like industrial pc, ALIX and others, and offers services and possibilities like

- packet radio,
- APRS,
- lightning log,
- small webserver,
- SVX-Link (Echolink)

especially in networks like HAMNET and similar.

One goal is a minimum on material expenditure and also a minimal current consumption, followed by a maximum of features

More information on the hamradio TCE - tinycore linux project coming here soon

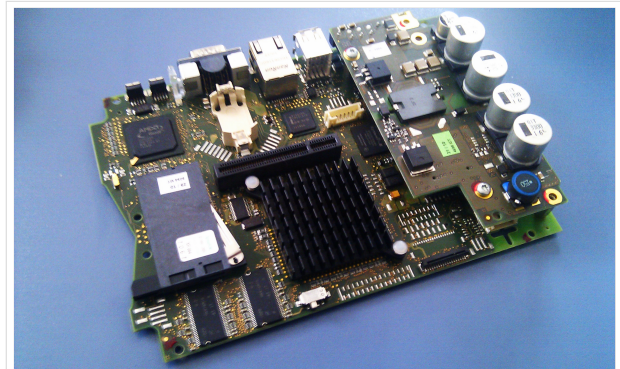


500MHz LowPower industrial PC

Hardware

DH2IW Wolfgang, OE2WAO Mike and OE5DXL Chris are doing first experiments with discarded industrial pc hardware, a 500MHz AMD Geode CPU with up to 256MB of RAM, and a minimal power input of <5Watt (for remaining stock ask [OE2WAO](#)).

But every other hardware platform like ALIX or similar will do.

The operating system is placed on a CF memory card (>32MB).

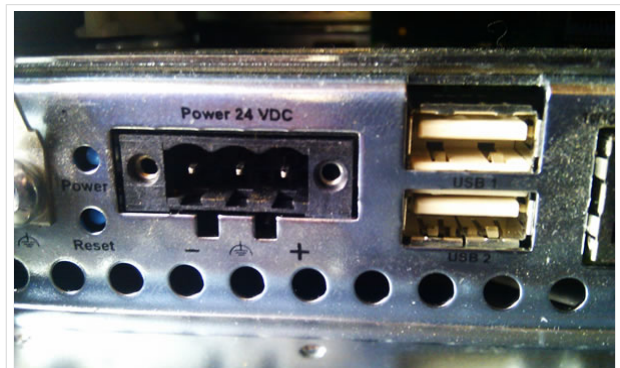

polarity industrial PC

A USB soundcard is used for AFSK mods. One

special character of working devices is a 3rd connector beside microphone and line out, the line in. Because these device are real stereo and make it possible to operate two separate channels on one sound card.

Connections and conversion of the used industrial pc

There are several connectors (COM, USB, network) on the frontside of our panels, as you can see. For correct polarity it is important to connent the + pole to the right pin of the 3pol power supply connector, the pin which is closer to the USB ports. The negative pole is the left pin.

The normal board supply is 24V.

That we can use it with our 12V power supply, we have to do a little modification. Just add a 270k Ohm resistor on the bottom side of the power supply as shown in the picture.



power supply conversion 12V

Soundcard


If there is no onboard sound available, you can use a USB soundcard instead. Suggested types you can find [here](#).

Software

A ready-to-use software image is located on the [OE2WAO Server](#) (e.g. tc455x-128.zip means version 4.55 with GUI on 128MB data drive)

There is also a version for raspberry pi hardware in test, and available soon.

Software schematic

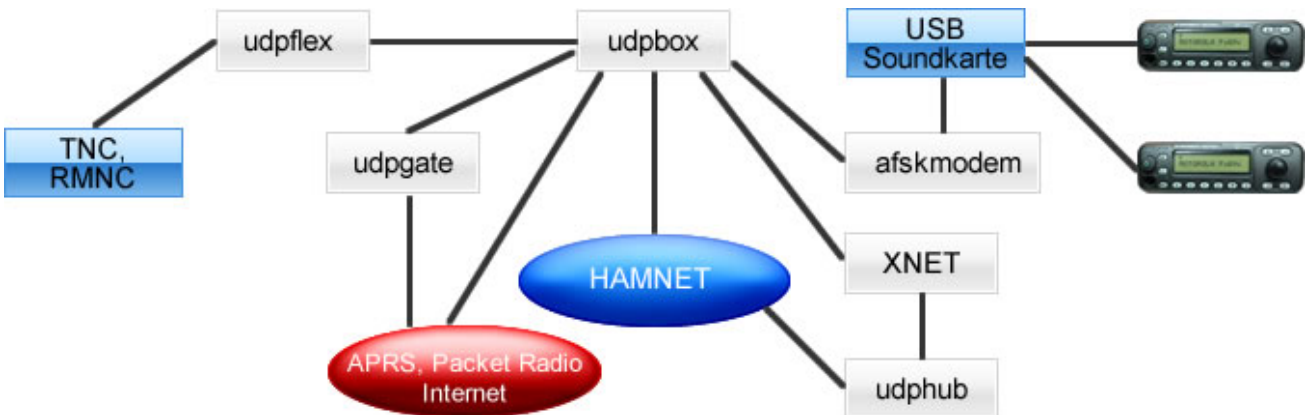

Help

If you need help on configuring the software packages you can contact OE5DXL on packet radio convers channel 44 or 4711.